

LL42-1021-ESLED

42" Ceiling fan with LED Light Kit.

Available in 4 Finishes

Finishes:

- Brushed Nickel Finish with Brushed Nickel Blades (BN)
- Brushed Nickel Finish with Walnut Blades (BNW)
- Oil Rubbed Bronze with Walnut Blades (ORBW)
- White Finish with White Blades (WH)

Lens Material: Glass

Blades: 3 MDF Blades

Dimensions: 42.0"OD x 11.875"OH


Light Source: 120V/ 15.5W/1240lm (Source) 789lm (Del)/30K/90CRI/
Dimmable

Mounting: Flat Ceilings Only – no downrod or slope adapters available

Lead Wire: Includes 12" of Lead Wire

Notes/Certifications/Warranty:

- 120V
- Dimming: TRIAC or ELV, 10-100%
- Pull Chain Standard
- Remote Control *(Sold Separately Part# LLRC-10-AC)*
- Wall Control *(Sold Separately Part# LLWC8 or LLWC16)*
- AC Motor |153 x 9 mm motor | 3 capacitors
- RPM: High: 232 Low: 97
- CFM-High:3214/Low: 1248 | Watts-High:43.57/Low:7.94 | Efficiency = 73.8
- Speeds: 3, Reversible
- UL listed for dry locations
- Energy Star Rated
- Fan Motor: Limited Lifetime Warranty
- LED Light Kit: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

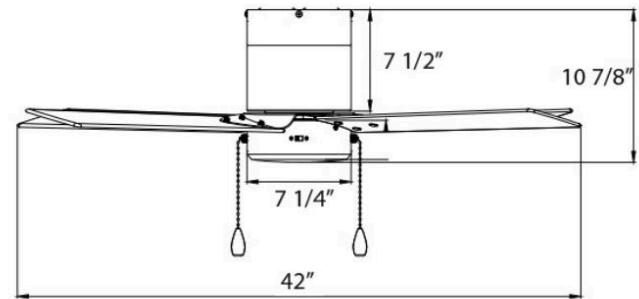

ORDERING INFORMATION

Part #	Finish
LL42-1021-ESLED	BN BNW ORBW WH

Wireless Remote With Receiver

LLRC-10-AC 3 Speed Remote Control

Features:

- Hand-held remote control for AC motor ceiling fans
- 3-speed fan control - Hi, Med, Low, Off
- Light control - On-Off, full-range dimming
- Canopy Wall Mount
- White finish

Dimensions: 4.5" L x 4.5" W x 0.87" W

Electrical:

- 120V/ 50-60 H
- 3 Wire Installatio
- 1.5A Max Load for Ceiling Fa
- 300W Max Load for Ligh
- Use with CFL and LED Source
- Maximum distance is 20 fee

Transmitter:

- Listed for Dry location applications onl
- Requires 9V Battery (not included)

Receiver:

- 4-DIP Switches; 16 possible combination fo multiple fan operation
- Not Suitable for Multi-Family Units



Notes/Certifications/Warranty:

- UL Listed for Dry Location
- FCC Certified
- 1 Year Limited Warranty



ORDERING INFORMATION

Model
LLRC-10-AC



Wall Controls

LLWC8-WH 4 Speed

Features:

- 4 Speed Fan Control
- Full-range dimming of light


Dimensions: 1.75"W x 4.125"H

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Not for Multiple Fan Control
- cULus Listed



LLWC-16WH 3 Speed

Features:

- Single sliding 3-speed on/off control switch for ceiling fans; High, Medium, Low, Off
- On/Off Light Control

Dimensions: 1.77" W x 4.134" H x 1.97" D

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Not for Multiple Fan Control
- cULus Listed



ORDERING INFORMATION

Model
LLWC8-WH LLWC-16WH