

LL44-1049-MBLED-930DM 44" Ceiling Fan with Medium Base LED Light Kit

Finishes:

- Brushed Nickel with Brushed Nickel Blades (BN)
- Black with Black Blades (BLK)
- Oil Rubbed Bronze with Oil Rubbed Bronze Blades (ORB)
- White with White Blades (WH)

Dimensions: 44.00"OD X 16.00" H


Shade: Satin white glass

Blades: 3 Plywood Blades

Light Source Included: 2 x 120V/9W/30K/Dimmable LED A19 Lamps

Notes/Certifications/Warranty:

- 120V
- 4" Downrod
- Lead Wire: 76"
- Installation: Down Rod Only
- Pull Chain Standard
- Remote Control *(Sold Separately Part# LLRC10AC)*
- Wall Control *((Sold Separately Part#LLWC8WH or LLWC16WH))*
- AC Motor | 153 x 15 mm | 3 capacitors
- Speeds: 3, Reversible
- RMP: 2264 (High)/ 147 (Low)
- CFM: 4361
- Airflow Efficiency: 91.4
- cETLus Listed for Dry Locations
- CEC JA8 Compliant
- Limited Lifetime Motor Warranty
- 1 Year Limited Warranty on Lamps
- All other Parts have a 1 Year Warranty

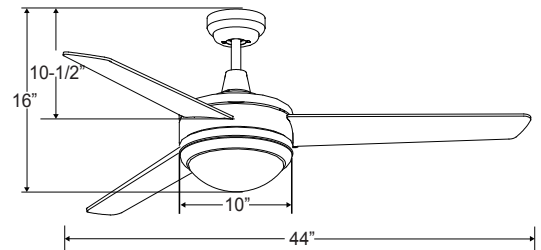

ORDERING INFORMATION

Model	Finish
LL44-1049-MBLED-930	BN BLK ORB WH

Downrods

LLDR 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", 48", 60", and 72"
- For use when installing on a sloped ceiling
- Recommended 7" of clearance under ceiling fan blades



Part #	Finish
LLDR12	BN
LLDR18	BLK
LLDR24	WH
LLDR36	ORB
LLDR48	
LLDR60	
LLDR72	

Wireless Remote With Receiver

LLRC-10-AC 3 Speed Remote Control

Features:

- Hand-held remote control for AC motor ceiling fans
- 3-speed fan control - Hi, Med, Low, Off
- Light control - On-Off, full-range dimming
- Canopy Wall Mount
- White finish

Dimensions: 4.5" L x 4.5" W x 0.87" W

Electrical:

- 120V/ 50-60 H
- 3 Wire Installatio
- 1.5A Max Load for Ceiling Fa
- 300W Max Load for Ligh
- Use with CFL and LED Source
- Maximum distance is 20 fee

Transmitter:

- Listed for Dry location applications only
- Requires 9V Battery (not included)

Receiver:

- 4-DIP Switches; 16 possible combination for multiple fan operation
- **Not Suitable for Multi-Family Units**


Notes/Certifications/Warranty:

- UL Listed for Dry Location
- FCC Certified
- 1 Year Limited Warranty



ORDERING INFORMATION

Model
LLRC-10-AC

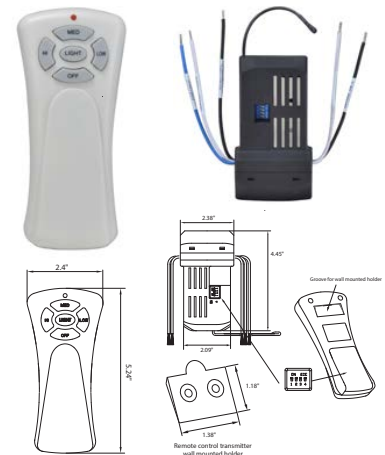

Wall Controls

LLWC8-WH 4 Speed

Features:

- 4 Speed Fan Control
- Full-range dimming of light


Dimensions: 1.75"W x 4.125"H

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Wall Control must be Mounted Indoors
- Not for Multiple Fan Control
- cULus Listed for Dry Locations

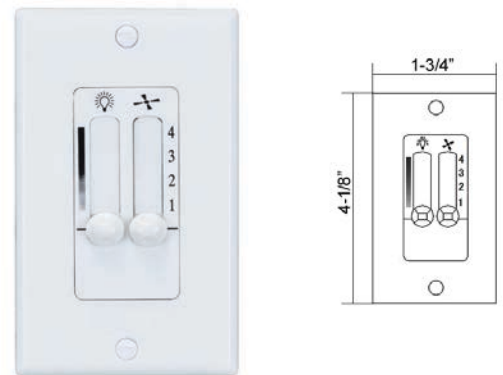

LLWC16-WH 3 Speed

Features:

- Single sliding 3-speed on/off control switch for ceiling fans; High, Medium, Low, Off
- On/Off Light Control

Dimensions: 1.77" W x 4.134" H x 1.97" D

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Wall Control must be Mounted Indoors
- Not for Multiple Fan Control
- cULus Listed for Dry Locations



ORDERING INFORMATION

Model
LLWC8-WH LLWC-16WH