

## LL52-1022-LED

### 52" Ceiling fan with LED Light Kit. Available in 4 Finishes

**Finishes:**

- Brushed Nickel Finish with Brushed Nickel Blades (BN)
- Brushed Nickel Finish with Walnut Blades (BNW)
- Oil Rubbed Bronze with Walnut Blades (ORBW)
- White Finish with White Blades (WH)

**Lens Material:** Satin White Glass

**Blades:** 3 MDF Blades

**Dimensions:** 52.00"OD x 11.50"H


**Light Source:** 120V/ 15W/1521lm (Source) 789lm (Del)/30K/80CRI/  
Dimmable

**Mounting:** Flat Ceilings Only – no downrod or slope adapters available

**Lead Wire:** Includes 12" of Lead Wire

**Notes/Certifications/Warranty:**

- 120V
- Pull Chain Standard
- Remote Control *(Sold Separately Part# LLRC-10-AC)*
- Wall Control *(Sold Separately Part# LLWC8 or LLWC16)*
- AC Motor | 153 x 14 mm motor | 3 capacitors
- RPM: High: 189 Low: 84
- CFM: 4498 | Watts: 55.94 | Efficiency = 80
- Speeds: 3, Reversible
- UL listed for dry locations
- Fan Motor: Limited Lifetime Warranty
- LED Light Kit: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

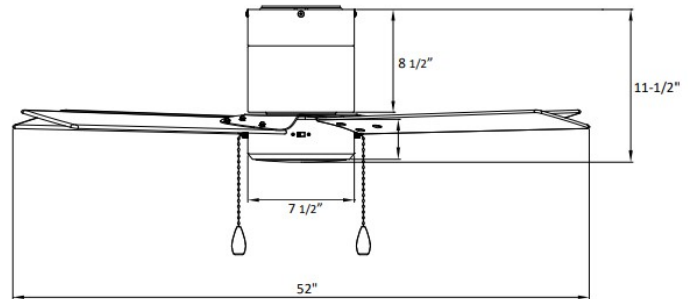

**ORDERING INFORMATION**

Part #	Finish
LL52-1022-LED	BN BNW ORBW WH

## Wireless Remote With Receiver

### LLRC-10-AC 3 Speed Remote Control

**Features:**

- Hand-held remote control for AC motor ceiling fans
- 3-speed fan control - Hi, Med, Low, Off
- Light control - On-Off, full-range dimming
- Canopy Wall Mount
- White finish

**Dimensions:** 4.5" L x 4.5" W x 0.87" W

**Electrical:**

- 120V/ 50-60 H
- 3 Wire Installatio
- 1.5A Max Load for Ceiling Fa
- 300W Max Load for Ligh
- Use with CFL and LED Source
- Maximum distance is 20 fee

**Transmitter:**

- Listed for Dry location applications onl
- Requires 9V Battery (not included)

**Receiver:**

- 4-DIP Switches; 16 possible combination fo multiple fan operation
- Not Suitable for Multi-Family Units



**Notes/Certifications/Warranty:**

- UL Listed for Dry Location
- FCC Certified
- 1 Year Limited Warranty



**ORDERING INFORMATION**

<b>Model</b>
LLRC-10-AC

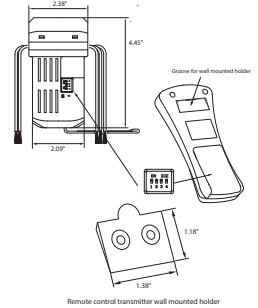

## Wall Controls

### LLWC8-WH 4 Speed

**Features:**

- 4 Speed Fan Control
- Full-range dimming of light


**Dimensions:** 1.75"W x 4.125"H

**Electrical:**

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

**Notes/Certifications/Warranty:**

- Installs in a standard single-gang electrical box.
- Not for Multiple Fan Control
- cULus Listed

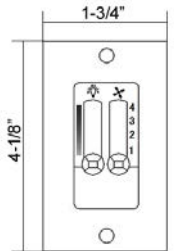

### LLWC-16WH 3 Speed

**Features:**

- Single sliding 3-speed on/off control switch for ceiling fans; High, Medium, Low, Off
- On/Off Light Control

**Dimensions:** 1.77" W x 4.134" H x 1.97" D

**Electrical:**

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

**Notes/Certifications/Warranty:**

- Installs in a standard single-gang electrical box.
- Not for Multiple Fan Control
- cULus Listed



**ORDERING INFORMATION**

<b>Model</b>
LLWC8-WH LLWC-16WH