

## LL52-1052

### 52" Ceiling Fan with Pull Chain. Available in 8 Finishes.

**Finishes:**


- Brushed Nickel Finish with Brushed Nickel Blades (BN)
- Brushed Nickel Finish with Natural Maple Blades (BNNM)
- Brushed Nickel Finish with Walnut Blades (BNW)
- Brushed Nickel Finish with White Blades (BNWH)
- Brushed Nickel Finish with Rosewood Blades (BNRW)
- Matte Black with Matte Black Blades (MBLK)
- Oil Rubbed Bronze Finish with Walnut Blades(ORBW)
- White Finish with White Blades (WH)

**Dimensions:** 52.00"OD x 11.625"OH

**Blades:** 5 MDF Blades

**Notes/Certifications/Warranty:**

- 120V
- 4" Downrod
- Lead Wire: 52"
- Installation: Dual Mount
- Contact your Lumencia rep with the fan part number and slope angle if you are mounting to a sloped ceiling – we will let you know if this fan requires further accessories to accommodate
- Pull Chain Standard
- Remote Control (Sold Separately Part# LLRC-10-AC)
- Wall Control (Sold Separately Part# LLWC8-WH or LLWC16-WH)
- Light Kit Adaptable (See your Lumencia Rep for Compatible Light Kits)
- AC Motor | 153 x 12 mm | 3 capacitors
- Speeds: 3, Reversible
- RMP: 162 (High)/75 (Low)
- CFM: 3020
- Airflow Efficiency: 77.44
- UL Listed for Damp Locations
- CEC Title 20 Compliant
- Limited Lifetime Motor Warranty
- All other Parts have a 1 Year Warranty.

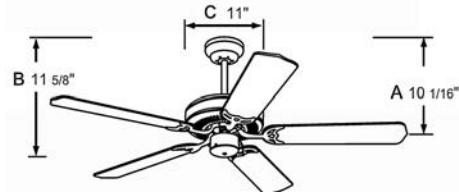

#### ORDERING INFORMATION

Part #	Finish
LL52-1052	BN BNNM BNW BNWH BNRW MBLK ORBW WH

## LK82-MBLED-ES

### Energy Star Rated Light Kit in 5 Finishes

**Construction:** Steel Frame

**Lens:** Satin Glass

**Dimensions:** 11.00"OD x 4.25"H

**Finishes:**

- Brushed Nickel (BN)
- Black (BLK)
- Matte Black (MBL)
- Oil Rubbed Bronze (ORB)
- White (WH)

**Light Source:** Includes 2 x 120V9w/1600lm/@30K/90CRI/Dimmable Medium Base LED A19 Lamps


**Notes/Certifications/Warranty:**

- 120V
- Pull Chain Standard
- TRIAC Dimmable: 10-100%
- cETLus Listed for Dry Locations
- Energy Star Listed
- 25K Life Hours
- 1 Year Limited Warranty



**ORDERING INFORMATION**

Part #	Finish
LK82-MBLED-ES	BN BLK MBL ORB WH

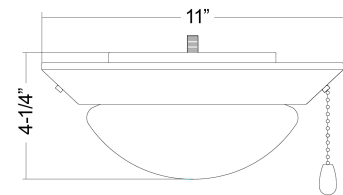

## LLK18-ES-3X9W

### Ceiling Fan Light Kit in 4 Finishes

**Construction:** Steel Base

**Lens:** Alabaster Glass Lens

**Finishes:**

- Brushed Nickel (BN)
- Oil Rubbed Bronze (ORB)
- White (WH)
- Black (BLK)

**Dimensions:** 12.00"OD x 6.75"H

**Light Source (Included):** 3x 120V/9w/800lm(Source) 30K/90CRI/Dimmable Medium Based LED A19 Lamps


**Notes/Certifications/Warranty:**

- 120V
- Dimmable TRIAC, 10-100%
- Energy Star 4.0 Compliant
- cETLus listed
- 25K Life Hours
- 1 Year Limited Warranty



**ORDERING INFORMATION**

Part #	Finish
LLK18-ES-3X9W	BN ORB WH BLK

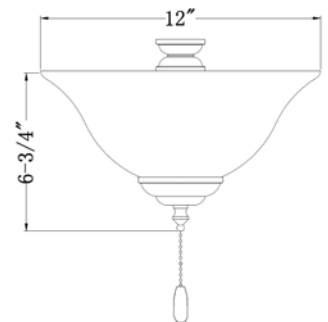

**LK30-MBLED**

**3 Light Ceiling Fan Light Kit in 4 Finishes with Several Shade Options.**

**Construction:** Steel Housing

**Finishes:**

- Brushed Nickel (BN)
- Oil Rubbed Bronze (ORB)
- White (White)
- Matte Black (MBL)

**Dimensions:** 6.1875"OD x 3.125"H

**Light Source (Included)** 3 x 120V/9w/@30K/80CRI/  
Dimmable Medium Base LED A19 Lamps

**Notes/Certifications/Warranty:**

- 120V
- Pull Chain Standard
- TRIAC Dimmable: 10-100%
- cULus Listed for Dry Locations
- 50K Life Hours
- 1 Year Limited Warranty

Part #	Finish
LK30-MBLED	BN ORB WH MBL



**LK412-MBLED**

**4 Light Ceiling Fan Light Kit in 3 Finishes**

**Construction:** Steel Housing

**Finishes:**

- Brushed Nickel (BN)
- Oil Rubbed Bronze (ORB)
- White (White)

**Dimensions:** 7.00"OD x 2.875"H

**Light Source (Included)** 4 x 120V9w/@30K/80CRI/  
Dimmable Medium Base LED A19 Lamps

**Notes/Certifications/Warranty:**

- 120V
- Pull Chain Standard
- TRIAC Dimmable: 10-100%
- cULus Listed for Dry Locations
- CEC JA8 Compliant \*
- 1 Year Limited Warranty

**ORDERING INFORMATION**

Part #	Finish
LK412-MBLED	BN ORB WH



**2 1/4" Side Shades**



**LL2004-CG-SS**  
Clear Glass Side Shade



**LL2004-FG-SS**  
Frosted Glass Side Shade



**LL2015-CG-SS**  
Frosted Glass Side Shade



**LL2015-FG-SS**  
Frosted Glass Side Shade



**LL2021-OG-SS**  
Opal Glass Side Shade



**LL2061-AG-SS**  
Alabaster Glass Side Shade

**ORDERING INFORMATION**

Shades
LL2004-CG-SS
LL2004-FG-SS
LL2015-FG-SS
LL2021-OG-SS
LL2061-AG-SS

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## Downrods








LLDR 1/2" Downrod available in several sizes.

**Features:**

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", and 48"
- Recommended 7' of clearance under ceiling fan blades



Part #	Finish
LLDR12	BN
LLDR18	BLK
LLDR24	WH
LLDR36	ORB
LLDR48	

Part #	Image	Speeds/ Light Control	Electrical Notes	Notes
<b>LLRC-10-AC</b> 3 Speed Hand-held remote control for AC motor ceiling fans		<ul style="list-style-type: none"> <li>• 3-speed fan control - Hi, Med, Low, Off</li> <li>• Light control - On-Off, full-range dimming</li> </ul>	<ul style="list-style-type: none"> <li>• 120V/ 60Hz</li> <li>• 3-wire installation</li> <li>• 1.5A Max Load for Ceiling Fan</li> <li>• 300W Max Load for Light</li> <li>• Compatible with LED, CFL and Incandescent Fans</li> </ul> <p><b>Transmitter:</b> Requires 9V Battery (not included)</p> <p><b>Receiver:</b> 4-DIP Switches; 16 possible combination for multiple fan operation</p> <p><b>Not Suitable for Multi-Family Units</b></p>	<p><b>Dimensions:</b> 4.5" L x 4.5" W x 0.87" W</p> <ul style="list-style-type: none"> <li>• Canopy Wall Mount</li> <li>• White Finish</li> <li>• 3 Wire Installation</li> <li>• Use with CFL and LED Source</li> <li>• Maximum distance is 20 feet</li> <li>• UL Listed for Dry location applications</li> <li>• FCC Certified</li> <li>• 1 Year Limited Warranty</li> </ul> 
<b>LLWC8-WH</b> 4 Speed Wall Control for Fans with Light Kits		<ul style="list-style-type: none"> <li>• 4 Speed Fan Control</li> <li>• Full-range dimming of light</li> </ul>	<ul style="list-style-type: none"> <li>• 120V/ 60Hz</li> <li>• 3-wire installation</li> <li>• Compatible with LED, CFL and Incandescent Fans</li> </ul>	<p><b>Dimensions:</b> 1.75"W x 4.125"H 1.75"W x 4.125"H</p> <ul style="list-style-type: none"> <li>• Installs in a standard single-gang electrical box.</li> <li>• Wall Control must be Mounted Indoors</li> <li>• Not for Multiple Fan Control</li> <li>• cULus Listed for Dry Locations</li> </ul> 
<b>LLWC16-WH</b> 3 Speed Wall Control for Fans with Light Kits		<ul style="list-style-type: none"> <li>• 3 Speed Fan Control- Hi, Med, Low, Off</li> <li>• On/Off Light Control</li> </ul>	<ul style="list-style-type: none"> <li>• 120V/ 60Hz</li> <li>• 3-wire installation</li> <li>• Compatible with LED, CFL and Incandescent Fans</li> </ul>	<p><b>Dimensions:</b> 1.75"W x 4.125"H 1.75"W x 4.125"H</p> <ul style="list-style-type: none"> <li>• Installs in a standard single-gang electrical box.</li> <li>• Wall Control must be Mounted Indoors</li> <li>• Not for Multiple Fan Control</li> <li>• cULus Listed for Dry Locations</li> </ul> 
<b>LLWC13-WH</b> 4 Speed Fan Control For Fan Only		<ul style="list-style-type: none"> <li>• 4 Speed Fan Control</li> </ul>	<ul style="list-style-type: none"> <li>• 120V/ 60Hz</li> <li>• Fan Load Max 1.25A   Light Load Max 500W</li> <li>• Compatible with CFL Fans</li> </ul>	<p><b>Dimensions:</b> 1.75" W x 4.125" H</p> <ul style="list-style-type: none"> <li>• 3-wire installation</li> <li>• Installs in a standard single-gang electrical box.</li> <li>• Wall Control must be Mounted Indoors</li> <li>• Not for Multiple Fan Control</li> <li>• cULus Listed for Dry Locations</li> </ul> 