

LL52-10571-C-LED 52" Ceiling Fan with Reversible Blades and LED Light Kit.

Finishes:

- Brushed Nickel with Reversible Brushed Nickel/Walnut Blades (BNW)
- Matte Black and Matte Black Blades (MBL)
- Matte White with White Blades (MWH)
- Oil Rubbed Bronze with Reversible Oil Rubbed Bronze/Walnut Blades (ORBW)

Dimensions: 52.00"OD x 12.25"


Shade: Frosted Bowl Glass

Blades: 5 MDF Blades

Light Source: 3 x 4.0W/1200lm(Source)/988lm(Delivered)
30K/80CRI/ Dimmable Candelabra E12 Base LED Bulbs (Inc.

Notes/Certifications/Warranty:

- 120V
- 5" Downrod
- Lead Wire: 52"
- Installation: Dual Mount
- Contact your Lumencia rep with the fan part number and slope angle if you are mounting to a sloped ceiling – we will let you know if this fan requires further accessories to accommodate
- Pull Chain Standard
- Remote Control (Sold Separately Part# LLRC-10-AC)
- Wall Control (Sold Separately Part# LLWC8-WH or LLWC16-WH)
- AC Motor | 172 x 18 mm motor | 3 capacitors
- Speeds: 3, Reversible
- RPM: 184 (High)/ 102 (Low)
- CFM: High:4133/Low2151
- Watts: High:42.32/Low:13.97
- Efficiency: 110
- UL Listed for Dry Locations
- Energy Star Listed
- Limited Lifetime Motor Warranty
- 1 Year Warranty on Light Kit
- All other Parts have a 1 Year Warranty

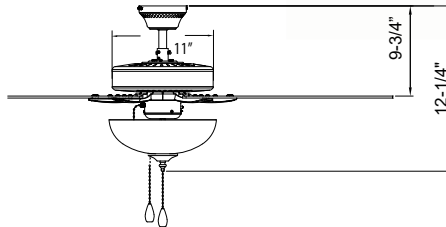

ORDERING INFORMATION

Model	Finish
LL52-10571-C-LED	BNW MBL MWH ORBW

Job Name: _____

Type: _____

Part #: _____

Notes: _____

Downrods








LLDR 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", and 48"
- Recommended 7' of clearance under ceiling fan blades



Part #	Finish
LLDR12	BN
LLDR18	BLK
LLDR24	WH
LLDR36	ORB
LLDR48	

Part #	Image	Speeds/ Light Control	Electrical Notes	Notes
LLRC-10-AC 3 Speed Hand-held remote control for AC motor ceiling fans		<ul style="list-style-type: none"> • 3-speed fan control - Hi, Med, Low, Off • Light control - On-Off, full-range dimming 	<ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • 1.5A Max Load for Ceiling Fan • 300W Max Load for Light • Compatible with LED, CFL and Incandescent Fans <p>Transmitter: Requires 9V Battery (not included)</p> <p>Receiver: 4-DIP Switches; 16 possible combination for multiple fan operation</p> <p>Not Suitable for Multi-Family Units</p>	<p>Dimensions: 4.5" L x 4.5" W x 0.87" W</p> <ul style="list-style-type: none"> • Canopy Wall Mount • White Finish • 3 Wire Installation • Use with CFL and LED Source • Maximum distance is 20 feet • UL Listed for Dry location applications • FCC Certified • 1 Year Limited Warranty 
LLWC8-WH 4 Speed Wall Control for Fans with Light Kits		<ul style="list-style-type: none"> • 4 Speed Fan Control • Full-range dimming of light 	<ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans 	<p>Dimensions: 1.75"W x 4.125"H1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations 
LLWC16-WH 3 Speed Wall Control for Fans with Light Kits		<ul style="list-style-type: none"> • 3 Speed Fan Control- Hi, Med, Low, Off • On/Off Light Control 	<ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans 	<p>Dimensions: 1.75"W x 4.125"H1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations 
LLWC13-WH 4 Speed Fan Control For Fan Only		<ul style="list-style-type: none"> • 4 Speed Fan Control 	<ul style="list-style-type: none"> • 120V/ 60Hz • Fan Load Max 1.25A Light Load Max 500W • Compatible with CFL Fans 	<p>Dimensions: 1.75" W x 4.125" H</p> <ul style="list-style-type: none"> • 3-wire installation • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations 