

LL60-1060-LED LL60-1060 60" Indoor Ceiling Fan.

Finishes:

- Brushed Nickel with Brushed Nickel Blades (BN)
- Black with Black Blades (BLK)
- Matte Black with Matte Black Blades (MBL)
- Oil Rubbed Bronze with Oil Rubbed Bronze Blades (ORB)
- White with White Blades (WH)

Dimensions:

LL60-1060-LED: 60.00"OD x 13.25"OH

LL60-1060: 60.00"OD x 12.25"OH


Lens: Acrylic

Blades: 6 Plywood Blades.

LL60-1060-LED Light Source: 120V/17w/1162lm Del@30K/90CRI/Dimmable

Notes/Certifications/Warranty:

- 120V
- 4" Downrod Included
- Downrod Mount Only
- Contact your Lumencia rep with the fan part number and slope angle if you are mounting to a sloped ceiling – we will let you know if this fan requires further accessories to accommodate
- Lead Wire: 76"
- Pull Chain Standard
- Remote Control *(Sold Separately Part# LLRC-10-AC)*
- Wall Control for LL60-1060-LED *(Sold Separately Part# LLWC8 or LLWC16)*
- LL60-1060-LED Motor: 153 x 12mm Motor | 3 capacitors
- LL60-1060 Motor: 172 x 14 mm Motor | 3 capacitors
- RPM: 147(High)/50(Low), CFM: 5326, Airflow
- LL601-1060-LED Efficiency: 76
- LL60-1060 Efficiency: 86
- Speeds: 3, Reversible
- Title 20 Compliant* *Ceiling Fan Only
- ETL Listed for Dry Locations
- Limited Lifetime Motor Warranty
- 5 Year Warranty on LED Light Kit
- All Non-Electrical Parts have a 1 Year Warranty

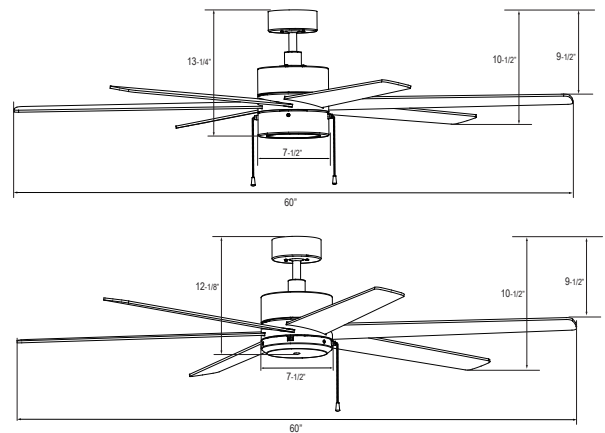

ORDERING INFORMATION

| Model | Finish |
|----------------------------|-------------------------------|
| LL60-1060-LED LL60-1060 | BN BLK MBL ORB WH |

Job Name: _____

Type: _____

Part #: _____


Notes: _____

Downrods









LLDR 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", 48", 60", and 72"
- Recommended 7" of clearance under ceiling fan blades



| Part # | Finish |
|--------|--------|
| LLDR12 | BN |
| LLDR18 | BLK |
| LLDR24 | WH |
| LLDR36 | ORB |
| LLDR48 | |
| LLDR60 | |
| LLDR72 | |

| Part # | Image | Speeds/ Light Control | Electrical Notes | Notes |
|---|---|---|--|--|
| LLRC-10-AC 3 Speed Hand-held remote control for AC motor ceiling fans |  | <ul style="list-style-type: none"> • 3-speed fan control - Hi, Med, Low, Off • Light control - On-Off, full-range dimming | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • 1.5A Max Load for Ceiling Fan • 300W Max Load for Light • Compatible with LED, CFL and Incandescent Fans <p>Transmitter: Requires 9V Battery (not included)</p> <p>Receiver: 4-DIP Switches; 16 possible combination for multiple fan operation</p> <p>Not Suitable for Multi-Family Units</p> | <p>Dimensions: 4.5" L x 4.5" W x 0.87" W</p> <ul style="list-style-type: none"> • Canopy Wall Mount • White Finish • 3 Wire Installation • Use with CFL and LED Source • Maximum distance is 20 feet • UL Listed for Dry location applications • FCC Certified • 1 Year Limited Warranty  |
| LLWC8-WH 4 Speed Wall Control for Fans with Light Kits |  | <ul style="list-style-type: none"> • 4 Speed Fan Control • Full-range dimming of light | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans | <p>Dimensions: 1.75"W x 4.125"H 1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations  |
| LLWC16-WH 3 Speed Wall Control for Fans with Light Kits |  | <ul style="list-style-type: none"> • 3 Speed Fan Control- Hi, Med, Low, Off • On/Off Light Control | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans | <p>Dimensions: 1.75"W x 4.125"H 1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations  |
| LLWC13-WH 4 Speed Fan Control For Fan Only |  | <ul style="list-style-type: none"> • 4 Speed Fan Control | <ul style="list-style-type: none"> • 120V/ 60Hz • Fan Load Max 1.25A Light Load Max 500W • Compatible with CFL Fans | <p>Dimensions: 1.75" W x 4.125" H</p> <ul style="list-style-type: none"> • 3-wire installation • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations  |