

ob ivanic.	
ype:	
ert #:	
lotes:	

LLKZXTEU

THIN DIE-CAST ALUMINUM EXIT SIGN

STANDARD









ILLUMINATION

• Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- · Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- · Quick-snap face plate closure.

Specification-grade, low profile, thin aluminum die-cast design.


 Available in single or double face only.



WARRANTY / LISTING

Inh Name

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C − 50°C).
- Certified to CEC under Title 20 Regulations.

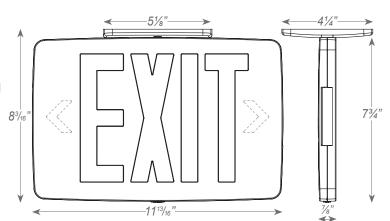

ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery
LLKZXTEU	1-Single Face	R-Red	WHT-White	Blank- AC Only
	2- Double Face	G-Green	BLK-Black A- Aluminum	EM- Battery Backup

May be available with other voltage, wattage, finish, and cable length options by special order.

Please contact your Lumencia Representative for more information.




Job Name:		
Type:		
Part #:		
Notes:		


BG-1 Vandal Shield:

- · High-impact resistant polycarbonate material.
- Mounting hardware provided for easy installation in the field.





PCS - 1 - Vandal Shields:

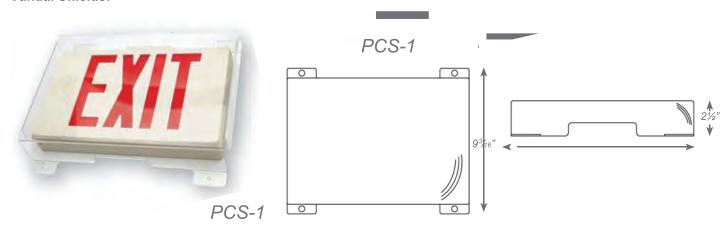

WG-1 Wire Guard:

- Durable 9-gauge steel construction.
- Mounting hardware provided for easy field installation.



