

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## Discontinued 07/2023

### LLFLEDR-2

#### LED FIXED OPTICS THERMOPLASTIC EMERGENCY UNIT

STANDARD



#### ILLUMINATION

- Long life, efficient, ultra bright white LED lamp heads.
- Two fixed, 2.0 watt LED lamp heads.
- High performance, chrome-plated metallized reflector and plastic lens for optimal light distribution.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Universal knockout pattern on back plate for surface mount. Snaps into place making internal electrical connections.
- Suitable for wall or ceiling mount.

#### HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.



#### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA Listed to UL 924 standards for damp locations (0°C – 40°C).

#### DIMENSIONS

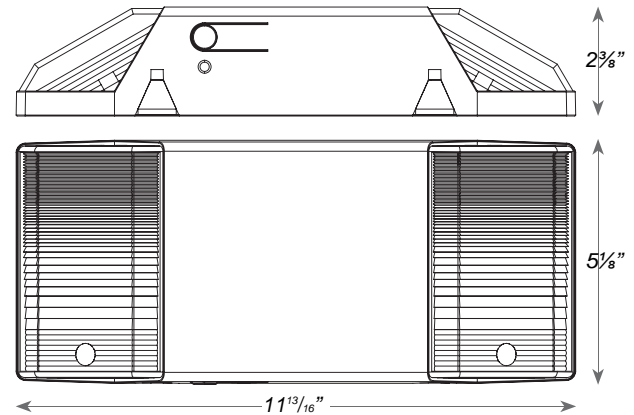

#### ORDERING INFORMATION

MODEL	HOUSING COLOR	
LLFLEDR-2	(blank)	White
	B	Black

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_



Notes: \_\_\_\_\_

## WIRE GUARDS

### WIRE GUARD

- Durable 9-gauge steel construction.
- Mounting hardware provided for easy field installation.

WG-1

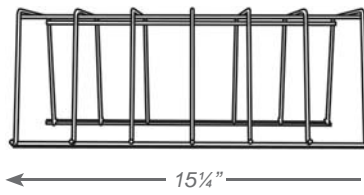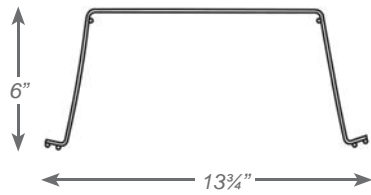

## VANDAL SHIELDS

### HOUSING / MOUNTING

- High-impact resistant polycarbonate material.
- Mounting hardware provided for easy installation in the field.



BG-R1

