

Discontinued 10/22/2025

LL70-1070W-ES

70" Wet Location Rated Ceiling Fan with Wall Control

Finishes:

- Brushed Pewter with Brushed Pewter Blades (BP)
- Oil Rubbed Bronze with Oil Rubbed Bronze Blades (ORB)
- White with White Blades (WH)


Dimensions: 70.00" OD x 11.75"OH

Blades:

- 7 Aluminum Blades.
- 18° Blade Pitch

Notes/Certifications/Warranty

- 120V
- 8" and 24" Downrod Included
- Downrod Mount Only
- Contact your Lumencia rep with the fan part number and slope angle if you are mounting to a sloped ceiling – we will let you know if this fan requires further accessories to accommodate
- Fan Must be Mounted with a Minimum of 10' of Clearance.
- Lead Wire: 76"
- Wall Control Included (*Must Mount Indoors*)
 - Controls Maximum of 3 fans without light kits
 - Controls a Maximum of 2 fans with light kits
- Remote Control (*LLRC-7 Sold Separately*)
- Optional Light Kits See Page 2.
- RPM: 145(High)/76(Low), CFM: 10012 Efficiency: 251
- 5 speed | Reversible
- UL Listed for Wet Locations
- Energy Star 4.0 Compliant
- Limited Lifetime Motor Warranty
- 5 Year Warranty on LED Light Kit
- All Non-Electrical Parts have a 1 Year Warranty

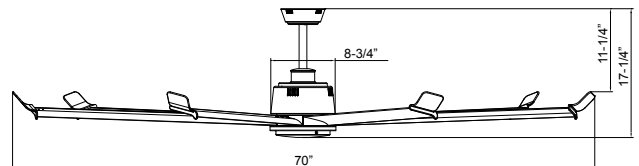

ORDERING INFORMATION

Model	Finish
LL70-1070W-ES	BP ORB WH

Job Name: _____

Type: _____

Part #: _____

Notes: _____

LL1RP69LK-LED

Wet Location Location Light Kit in 4 Finishes

Construction: Aluminum

Lens: Acrylic

Finishes: Brushed Pewter (BP), Oil Rubbed Bronze (ORB), White (WH), Matte Black (MBL)

Dimensions: 7.50"OD x 1.75"H

Light Sources: 120V/12W/700lm/30K/90CRI Dimmable TRIAC or ELV, 10-100%

Notes/Certifications/Warranty:

- 120V
- Pull Chain Standard
- Remote Control Adaptable (*Sold Separately Part #LLRC-10*)
- Wall Control Adaptable (*Sold Separately Part #WC-8 | WC-16*)
- ETLus Listed for Wet Locations
- CEC JA8 Compliant
- 50K Life Years
- LED Light: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty



ORDERING INFORMATION

Part #	Finish
LL1RP69LK-LED	BP ORB WH MBL

LL1RP88LK-LED

Dry Location Light Kit in 4 Finishes

Construction: Aluminum

Lens: Acrylic


Finishes: Brushed Nickel (BN), Oil Rubbed Bronze (ORB), White (WH), Black (BLK)

Dimensions: 7.375"OD x 1.50"H

Light Sources: 120V/17W/1200lm/30K/90CRI Dimmable

Notes/Certifications/Warranty:

- 120V
- Only for Use with Wall or Remote Controls
- JA8 Compliant
- cETLus listed for Dry Locations
- LED Light Kit: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

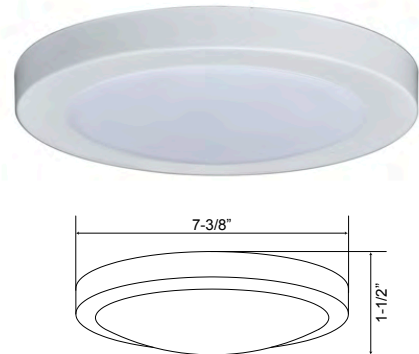

ORDERING INFORMATION

Part #	Finish
LL1RP88LK-LED	BN ORB WH BLK

LL1RP89LK-LED

Dry Location Light Kit in 4 Finishes

Construction: Aluminum

Lens: Acrylic


Finishes: Brushed Nickel (BN), Oil Rubbed Bronze (ORB), White (WH), Black (BLK)

Dimensions: 7.375"OD x 1.00"H

Light Sources: 120V/12W/840lm/30K/90CRI Dimmable

Notes/Certifications/Warranty:

- 120V
- Only for Use with Wall or Remote Controls
- JA8 Compliant
- cETLus listed for Dry Locations
- 50K Life Hours
- LED Lamp: 5 year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty

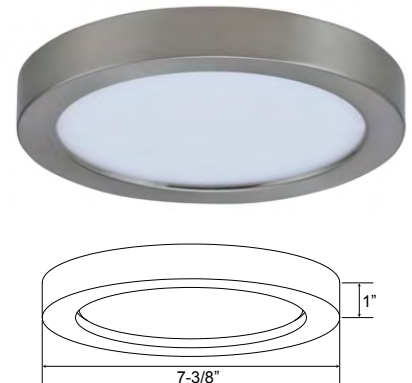

ORDERING INFORMATION

Part #	Finish
LL1RP89LK-LED	BN ORB WH BLK

LL1RP98LK-ESLED

Wet Location Rated Light Kit in 4 Finishes

Construction: Aluminum

Lens: Frosted Acrylic

Dimensions: 7.625"OD x 1.00"H

Finishes: Brushed Pewter (BP), Matte Black (MBL), Oil Rubbed Bronze (ORB), White (WH)

Light Source: 120V/12W/843lm/30K/90CRI Dimmable: TRIAC or ELV, 10-100%

Notes/Certifications/Warranty:

- 120V
- Remote Control Adaptable
- Wall Control Adaptable
- ETLus Listed for Wet Locations
- CEC JA8 Compliant
- 50K Life Hours
- LED Light: 5 Year Limited Warranty
- Non-Electrical: 1 Year Limited Warranty



ORDERING INFORMATION

Part #	Finish
LL1RP98LK-LED	BP MBL ORB WH



Job Name:

Type:

Part #:

Notes:

Downrods

LLDR: 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", 48", 60", and 72"
- Recommended 7" of clearance under ceiling fan blades



Part #	Finish
LLDR12	BP ORB WH
LLDR18	
LLDR24	
LLDR36	
LLDR48	
LLDR60	
LLDR72	

Optional Remote Control

LLRC-7 in White.

Speed/Light Control:

- 5 Speed Fan Control. Forward and Reverse
- Includes Timer Function
- On-Off Light Control

Mounting/Wiring:

- Canopy Wall Mounted
- 3-Wire Installation

Dimensions: 5.875" L x 1.50" W x 0.625" D

Electrical Notes:

- 120V- 60Hz
- 50W Max Load for Ceiling Fan
- 100W Max Load for Light (For Use with LED Sources)

Transmitter:

- Requires 2 x AAA Alkaline batteries (not included)
- Maximum Distance to fan/light kit is 49 feet

Receiver:

- Installed in Fan Canopy
- 1.375" L x 4.75" W x 2.125" D
- May pair up to a maximum of 10 fans/light kits

Not Suitable for Multi-Family Units

Notes/Certifications/Warranty

- UL Listed for Dry Locations
- FCC Certified
- 1 Year Limited Warranty

