

DISCONTINUED 08/2026

LLMPAL-MCT

MCT Multi-Purpose Area Luminaires

Features:

- Field selectable 35K, 40K, and 50K color temperatures.
- Long-life LEDs provide up to 149,000 hours of operation with at least 70% of initial lumen output (L70). *L70 hours are IES TM-21-11 calculated hours*

Electrical:

- Available models provide from 2,000 to 7,200 lumens, and from 125 to 156 lumens per watt (LPW).*
- Standard optic provides an IES roadway type V distribution, or a 7V (vertical) x 7H (horizontal) NEMA floodlight distribution.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.

Mounting Options/Accessories:


- Standard aluminum die-cast knuckle-mount for junction box installation.
- Yoke-mount option provides secure attachment to flat surfaces sold separately. (4L & 7L versions only)
- Line voltage ground stake allows for easy installation for landscape illumination, sold separately.

Notes/Certifications/Warranty:

- cULus listed for wet locations in ambient temperatures from -40°C to 50°C (-40°F to 122°F).
- IP65 rated for ingress protection.
- DLC premium approved.
- Lens is IK 10 rated for protection from external impacts.
- Salt fog tested for 1,000 hours (ASTM B117). After salt fog testing, paint rated at 7 per ASTM D1654-05 scratch test.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5, surge immunity protection (4kV).
- 5-year warranty of all electronics and housing.



Dimensions:

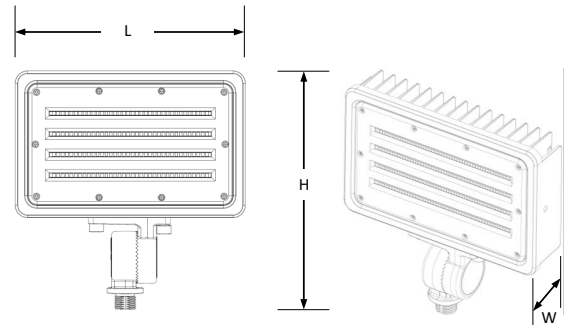

Model	Length (L)	Width (W)	Depth (H)	Weight
2L	4.3"	1.7"	5.8"	3 lbs.
4L	8.7"	1.9"	9"	8 lbs.
7L	8.7"	1.9"	9"	8 lbs.

2L

Front = 0.17 s.f.
Side = 0.07 s.f.
Face = 0.05 s.f.

4L & 7L

Front = 0.54 s.f. (knuckle) / 0.44 s.f. (yoke)
Side = 0.12 s.f. (knuckle) / 0.09 s.f. (yoke)
Face = 0.11 s.f. (knuckle) / 0.12 s.f. (yoke)



Model	Nominal Lumen Output	Mounting Accessories (Order Separately)
LLMPAL-MCT	2L 4L 7L	YM Yoke mount (4L & 7L ONLY) STK Line voltage ground stake

May be available with other voltage, wattage, and finish options by special order.
Please contact your Lumencia Representative for more information

Electrical Data:

Series	Measurements	LLMPAL-MCT-2L			LLMPAL-MCT-4L			LLMPAL-MCT-7L		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
LLMPAL-MCT	Lumens	2002	2179	2085	4436	4696	4526	6601	7170	6884
	Watts	16	15	16	31	30	31	52	49	51
	Efficacy	125	145	132	142	156	145	126	147	134
	Input Current (A)	120V = 0.13A 240V = 0.07A 277V = 0.06A	120V = 0.13A 240V = 0.06A 277V = 0.05A	120V = 0.13A 240V = 0.07A 277V = 0.06A	120V = 0.26A 240V = 0.13A 277V = 0.11A	120V = 0.25A 240V = 0.13A 277V = 0.11A	120V = 0.26A 240V = 0.13A 277V = 0.11A	120V = 0.43A 240V = 0.22A 277V = 0.19A	120V = 0.41A 240V = 0.20A 277V = 0.18A	120V = 0.43A 240V = 0.21A 277V = 0.18A

Photometric Data:


LLMPAL-MCT-2L

Luminaire Data

Description	Multi Purpose Area Light 2L - KFS
Total Lumens	2,002
Input Wattage	16
Efficacy (lm/W)	126
Max. Cd.	1131.47 (337.5H, 6V)
IES Classification	Type I
Longitudinal Classification	Very Short

Luminaire Classification Systems (LCS)

LCS Zone		Lumens	%Lum
FL	0-30	438	21.9%
FM	30-60	488	24.4%
FH	60-80	74	3.7%
FVH	80-90	3	0.2%
BL	0-30	434	21.7%
BM	30-60	491	24.5%
BH	60-80	71	3.6%
BVH	80-90	3	0.1%
UL	90-100	0	0.0%
UH	100-180	0	0.0%
Total		2,002	100.0%
BUG Rating		B1-U0-G0	

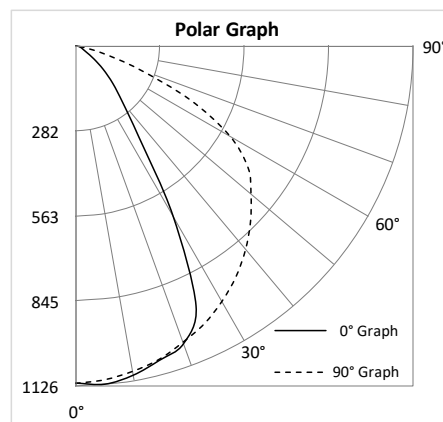


LLMPAL-MCT-4L

Luminaire Data

Description	Multi Purpose Area Light 4L - KFS
Total Lumens	4,436
Input Wattage	31
Efficacy (lm/W)	142
Max. Cd.	1625.57 (112.5H, 5V)
IES Classification	Type VS
Longitudinal Classification	Very Short

Luminaire Classification Systems (LCS)

LCS Zone		Lumens	%Lum
FL	0-30	625	14.1%
FM	30-60	1,190	26.8%
FH	60-80	372	8.4%
FVH	80-90	16	0.4%
BL	0-30	629	14.2%
BM	30-60	1,205	27.2%
BH	60-80	383	8.6%
BVH	80-90	16	0.4%
UL	90-100	0	0.0%
UH	100-180	0	0.0%
Total		4,436	99.9%
BUG Rating		B2-U0-G1	

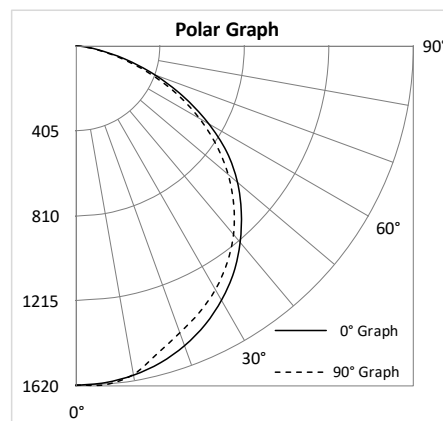

LLMPAL-MCT-7L

Luminaire Data

Description	Multi Purpose Area Light 7L - KFS
Total Lumens	6,601
Input Wattage	52
Efficacy (lm/W)	126
Max. Cd.	2750.84 (157.5H, 1V)
IES Classification	Type VS
Longitudinal Classification	Very Short

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum	
FL	0-30	989	15.0%
FM	30-60	1,783	27.0%
FH	60-80	519	7.9%
FVH	80-90	21	0.3%
BL	0-30	987	15.0%
BM	30-60	1,774	26.9%
BH	60-80	510	7.7%
BVH	80-90	19	0.3%
UL	90-100	0	0.0%
UH	100-180	0	0.0%
Total		6,601	100.0%
BUG Rating		B2-U0-G1	

