

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## DISCONTINUED 10/2024

### LLRMR-16-WP

MR-16 WET LOCATION SEMI-RECESSED POLYCARBONATE EMERGENCY UNIT



### ILLUMINATION

- Two fully adjustable, semi-recessed ultra bright, 7.2 watt MR-16 halogen lamp heads standard.
- High performance MR16 halogen lamps with smooth metallized reflector and glass lens for optimal light distribution.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.

### ORDERING INFORMATION Sample Part Number: LLRMR-16-WP

MODEL	HOUSING COLOR				OPTIONS	
LLRMR-16	(blank)	Gray	WP	Wet Location	HTR	Internal Heater
	B	Black			CW	Internal Heater With Battery Blanket
					USA	Assembled IN USA
					LED	3.3W High Lumen White LED Lamps 5.0W
					PLED	High Lumen White LED Lamps <sup>1</sup> Title 20
					CEC	Compliant

<sup>1</sup> Not available with SDT option.


### OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C – 40°C) applications.  
CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 50°C MR-16 halogen) (-25°C – 40°C LED).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act. LED: 3.3W
- high performance MR-16 base LED lamps for increased center-to-center spacing.
- CEC: Certified to CEC under Title 20 Regulations.
- PLED: 5.0W high performance MR-16 base LED lamps for premium center-to-center spacing

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).


### DIMENSIONS

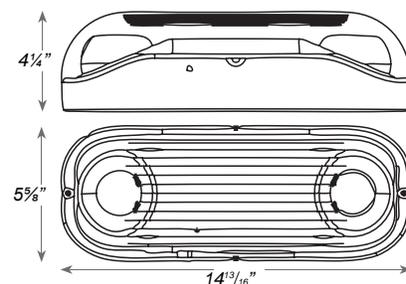

## WIRE GUARDS

### WIRE GUARD

- Durable 9-gauge steel construction.
- Mounting hardware provided for easy field installation.

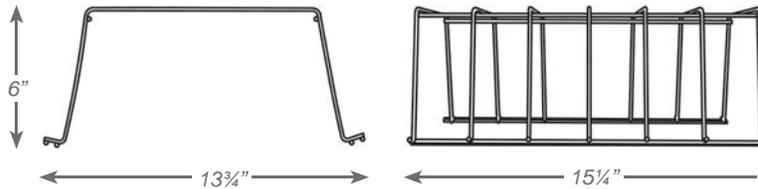


WG-1



## VANDAL SHIELDS

### HOUSING / MOUNTING

- High-impact resistant polycarbonate material.
- Mounting hardware provided for easy installation in the field.

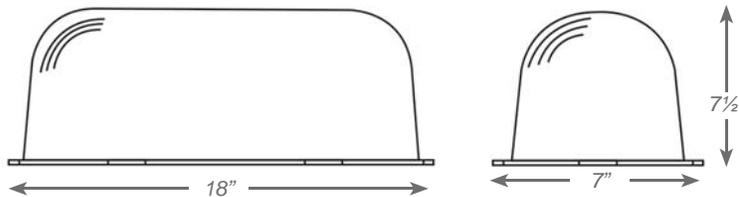

BG-R1

