

Multi-Unit Residential Lighting

PRODUCT SPECIFICATIONS

- LL182 = 12.5" Diameter (Small)
- LL183 = 15.0" Diameter (Medium)
- LL184 = 19.25" Diameter (Large)


Construction:

- Housing: White Enamel Steel Pan
- Lens: White Acrylic Lens with Textured Decorative Fabric (Specify Type)

Notes:

- Certification: Damp Location
- Mounting: Ceiling Only

DISCONTINUED

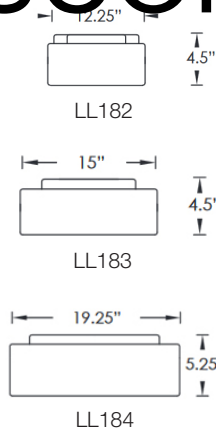

Job Name:

Type:



LR - Louver Resin



RP - Rapids



RS - Russell Square



VL - Vanilla Linen



Ordering Information:

Example = LL182-LR-1-12LED-30K

Dimensions: See drawings above

LL _____ - _____ - _____ - _____					STANDARD LED SPECIFICATIONS				
PART #	FABRIC	FINISH	LED	OPTIONS	VOLTAGE	INPUT WATTAGE	LUMENS	CRI	DIMMABLE
LL182	LR - Louver Resin	1 = White Acrylic Lens	6LED	30K, 35K, 40K	120-277V	13W	855	82	Non-Dimmable
	RP - Rapids		12LED	30K, 35K, 40K, B3	120-277V	14W	1710	82	0-10 Dimmable
	RS - Russell Square		13LED	30K	120-277V	17W	1278	80	Non-Dimmable
	VL - Vanilla Linen		13LED-120	30K, 40K	120V	13W	900	80	120V Dimmable
			14LED	30K, 35K, 40K, DIM	120-277V	12W	1100	81	Non-Dimmable
			14LED-120	30K, 40K	120V	14W	1350	80	120V Dimmable
			23LED-120	30K, 40K	120V	23W	1850	80	120V Dimmable

Available in Compact Fluorescent Lamping - MOQ will apply



All products are UL and/or ETL Certified.
2017.09



Job Name:

Type:

LL _____ - _____ - _____ - _____ - _____					STANDARD LED SPECIFICATIONS				
PART #	FABRIC	FINISH	LED	OPTIONS	VOLTAGE	INPUT WATTAGE	LUMENS	CRI	DIMMABLE
LL183	LR - Louver Resin	1 = White Acrylic Lens	6LED	30K, 35K, 40K	120-277V	13W	855	82	Non-Dimmable
	RP - Rapids		12LED	30K, 35K, 40K, B3	120-277V	14W	1710	82	0-10 Dimmable
	RS - Russell Square		13LED	30K	120-277V	17W	1278	80	Non-Dimmable
	VL - Vanilla Linen		13LED-120	30K, 40K	120V	13W	900	80	120V Dimmable
			14LED	30K, 35K, 40K, DIM	120-277V	12W	1100	81	Non-Dimmable
			14LED-120	30K, 40K	120V	14W	1350	80	120V Dimmable
			18LED	30K	120-277V	22W	1704	82	Non-Dimmable
			19LED	30K, 35K, 40K, B3	120-277V	22W	2565	80	0-10 Dimmable
			23LED-120	30K, 40K	120V	23W	1850	80	120V Dimmable

Available in Compact Fluorescent Lamping - MOQ will apply

LL _____ - _____ - _____ - _____ - _____					STANDARD LED SPECIFICATIONS				
PART #	FABRIC	FINISH	LED	OPTIONS	VOLTAGE	INPUT WATTAGE	LUMENS	CRI	DIMMABLE
LL184	LR - Louver Resin	1 = White Acrylic Lens	12LED	30K, 35K, 40K	120-277V	14W	1710	82	0-10 Dimmable
	RP - Rapids		29LED	30K, 35K, 40K	120-277V	22W	2565	82	0-10 Dimmable
	RS - Russell Square		26LED	30K, 35K, 40K	120-277V	28W	3420	82	0-10 Dimmable
	VL - Vanilla Linen								

Available in Compact Fluorescent Lamping - MOQ will apply

Replacement Parts:

LENS-182LR = 12.25" Louver Resin Lens
 LENS-182RP = 12.25" Rapids Lens
 LENS-182RS = 12.25" Russell Square Lens
 LENS-182VL = 12.25" Vanilla Linen Lens
 LENS-183LR = 15" Louver Resin Lens
 LENS-183RP = 15" Rapids Lens
 LENS-183RS = 15" Russell Square Lens
 LENS-183VL = 15" Vanilla Linen Lens
 LENS-184LR = 19.25" Louver Resin Lens
 LENS-184RP = 19.25" Rapids Lens
 LENS-184RS = 19.25" Russell Square Lens
 LENS-184VL = 19.25" Vanilla Linen Lens

Option Legend:

30K = 3000 Kelvin Warm White Light Temperature
 35K = 3500 Kelvin Medium White Light Temperature
 40K = 4000 Kelvin Cool White Light Temperature
 B3 = 6W LED Integral Battery Backup
 DIM = 120V Dimming Drive

