



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## LL3-4310D

### LL3-4310D-JA8-30K

Banded Exterior Wall Mount

#### Body Materials:

**Construction:** Die Cast Aluminum Facade, Steel Canopy Cover

**Shade:** Opal Polycarbonate

**Finishes:** Black (BLK), Custom Color (CC\*)

**Mounting:** Wall Mount

**Dimensions:** 14.10"H x 10.00"W x 5.70"E

#### Light Source:

- **LL3-4310D:** 120~277V/15W/990lm/80CRI/Non-Dimming Standard
- Available in 30K, 40K
- 120V TRIAC And 010V Dimming Optional
- **LL3-4310D-JA8-30K:** 120V/15W/30K/925lm/90CRI//120V TRIAC Dimming Standard
- 010V Dimming Optional


**Dimming:** TRIAC or 010V Dimming. *Lumencia recommends the use of a UL or ETL LED Ready Dimmer. Please contact Lumencia for a complete list of compatible dimmers. Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. We recommend testing dimmers prior to installation for larger projects.*

#### Options:

- **BBU:** Battery Back-up
- **PC:** Built in Photocell

#### Notes/Certification/Warranty:

- ETL/cETL Listed for Wet Locations
- 5 Year Limited Warranty

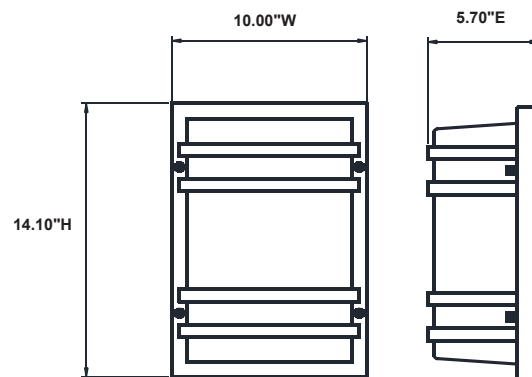

Model	Color Temp.	Finish	Options
LL3-4310D	30K 40K	BLK CC*	<b>BBU:</b> Battery Backup <b>PC:</b> Photocell <b>TRIAC:</b> TRIAC Dimming <b>010V:</b> 010V Dimming
LL3-4310D-JA8-30K			

\*Special Order-MOQ and Longer Lead Times may Apply.  
May be available with other voltage, wattage, and finish options by special order.  
Please contact your Lumencia Representative for more information