

LL44-1037W-ES 44" Energy Star Ceiling Fan. Wet Location Rated.

Finishes:

- Brushed Pewter with Brushed Pewter Blades (BP)
- Matte Black with Matte Black Blades (MBL)
- Oil Rubbed Bronze with Oil Rubbed Bronze Blades (ORB)


- White with White Blades (WH)

Dimensions: 44"OD x 12.375"OH

Blades: 3 ABS Waterproof Blades

Notes/Certifications/Warranty:

- 120V
- 4" Downrod
- Downrod Mount Only
- Lead Wire: 76"
- Pull Chain Standard
- Remote Control *(Sold Separately Part# LLRC-10-AC)*
- Wall Control *(Sold Separately Part# LLWC8-WH or LLWC16-WH
Wall Control must be mounted indoors)*
- *Light Kit (Sold Separately Part# LL1RP69LK-LED)*
- AC Motor | 172 x 14 mm motor | 3 capacitors
- Speeds: 3, Reversible
- RPM: 260 (High)/112 (Low)
- CFM: 4058
- Airflow Efficiency: 134
- ETLus Listed for Wet Locations
- CEC Title 20 Compliant
- Energy Star Rated
- Limited Lifetime Motor Warranty
- All other Parts Have a 1 Year Warranty.

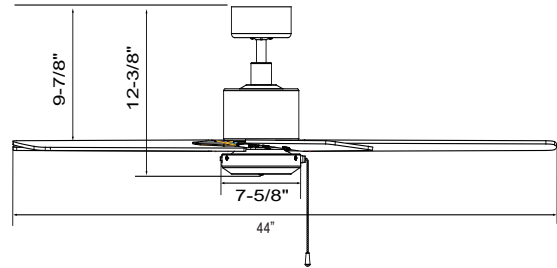

ORDERING INFORMATION

Model	Finish
LL44-1037W-ES	BP ORB MBL WH

LL1RP69LK-LED Light Kit

Wet Location Rated Light Kit. Available in 4 Finishes

Finishes:

- Brushed Pewter (BP)
- Matte Black (MBL)
- Oil Rubbed Bronze (ORB)
- White (WH)

Lens: Acrylic

Light Source: 120V/12W/700 lms Del@30K/90 CRI/TRIAC Dimming

Notes/Certifications/Warranty:

- 120V
- Pull Chain Standard
- Compatible Fans: LL52-1067-ES, LL44-1037W-ES and LL52-1015W-ES
- Remote Control: Adaptable (Sold Separately Part# LLRC-10-AC)
- Wall Control Adaptable (Sold Separately Part# LLWC8-WH or LLWC-16WH)
- ETLus Listed for Wet Locations
- CEC JA8 Compliant
- Energy Star Rated
- LED Light: 5 Year Limited Warranty
- 50 Life Hours
- Non-Electrical: 1 Year Limited Warranty



ORDERING INFORMATION

Model	Finish
LL1RP69LK-LED	BP MBL ORB WH

Job Name: _____

Type: _____

Part #: _____

Notes: _____

Downrods

LLDR 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", 48", 60", and 72"
- For use when installing on a sloped ceiling
- Recommended 7" of clearance under ceiling fan blades



Part #	Finish
LLDR12	BN
LLDR18	BLK
LLDR24	WH
LLDR36	ORB
LLDR48	
LLDR60	
LLDR72	

Wireless Remote With Receiver

LLRC-10-AC 3 Speed Remote Control

Features:

- Hand-held remote control for AC motor ceiling fans
- 3-speed fan control - Hi, Med, Low, Off
- Light control - On-Off, full-range dimming
- Canopy Wall Mount
- White finish

Dimensions: 4.5" L x 4.5" W x 0.87" W

Electrical:

- 120V/ 50-60 H
- 3 Wire Installatio
- 1.5A Max Load for Ceiling Fa
- 300W Max Load for Ligh
- Use with CFL and LED Source
- Maximum distance is 20 fee

Transmitter:

- Listed for Dry location applications only
- Requires 9V Battery (not included)

Receiver:

- 4-DIP Switches; 16 possible combination for multiple fan operation
- **Not Suitable for Multi-Family Units**


Notes/Certifications/Warranty:

- UL Listed for Dry Location
- FCC Certified
- 1 Year Limited Warranty



ORDERING INFORMATION

Model
LLRC-10-AC

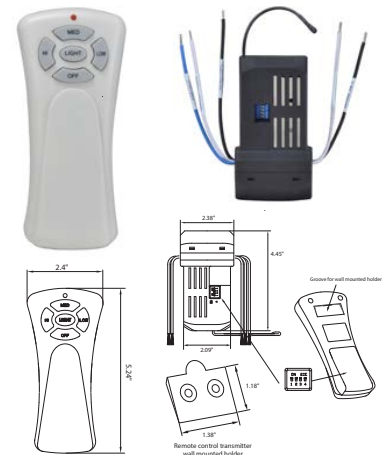

Wall Controls

LLWC8-WH 4 Speed

Features:

- 4 Speed Fan Control
- Full-range dimming of light


Dimensions: 1.75"W x 4.125"H

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Wall Control must be Mounted Indoors
- Not for Multiple Fan Control
- cULus Listed for Dry Locations

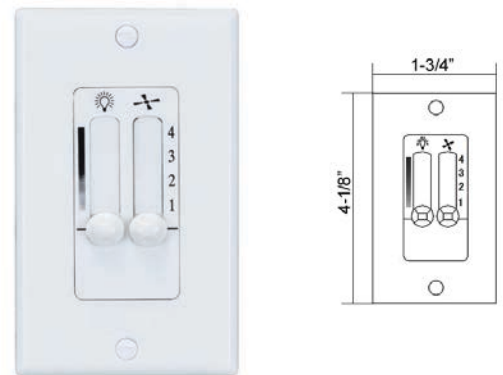

LLWC16-WH 3 Speed

Features:

- Single sliding 3-speed on/off control switch for ceiling fans; High, Medium, Low, Off
- On/Off Light Control

Dimensions: 1.77" W x 4.134" H x 1.97" D

Electrical:

- 120V/ 60Hz
- 3-wire installation
- Compatible with LED, CFL and Incandescent

Notes/Certifications/Warranty:

- Installs in a standard single-gang electrical box.
- Wall Control must be Mounted Indoors
- Not for Multiple Fan Control
- cULus Listed for Dry Locations



ORDERING INFORMATION

Model
LLWC8-WH LLWC-16WH