



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LL52-1068-ES 52" Energy Star Ceiling Fan. Wet Location Rated.

Finishes:

- Brushed Pewter with Brushed Pewter Blades (BP)
- Matte Black with Matte Black Blades (MBL)
- Oil Rubbed Bronze with Oil Rubbed Bronze Blades (ORB)
- White with White Blades (WH)

Dimensions: 52"OD x 12.375"OH


Blades: 4 ABS Blades.

Mounting:

- Down Rod Only: *Includes 4" Downrod*
- Includes 76" of Wire

Notes/Certifications/Warranty:

- 120V
- Pull Chain Standard
- Remote Control (*Sold Separately Part# LLRC-10-AC For Indoor Use Only*)
- Wall Control (*Sold Separately Part# LLWC-8 or LLWC-16 For Indoor Mounting Only*)
- *Light Kit* (*Sold Separately Part# LL1RP69LK-LED*)
- AC Motor | 172 x 14 mm motor | 3 capacitors
- Speeds: 3, Reversible
- RPM: 188 (High)/80 (Low)
- CFM: 4737 (High)/1981 (Low)
- Watts: 45.32 (High)/10.33 (Low)
- Airflow Efficiency: 108.9
- ETLus Listed for Wet Locations
- CEC Title 20 Compliant
- Energy Star Rated
- Limited Lifetime Motor Warranty
- All other Parts Have a 1 Year Warranty.

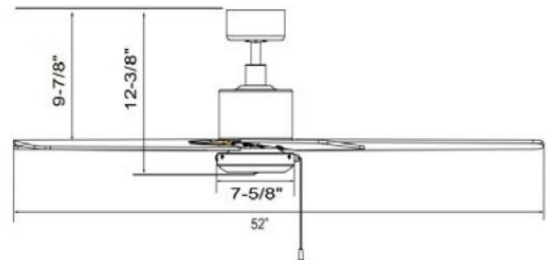

ORDERING INFORMATION

| Model | Finish |
|--------------|------------------------|
| LL52-1068-ES | BP ORB MBL WH |

LL1RP69LK-LED Light Kit

Wet Location Rated Light Kit. Available in 4 Finishes

Finishes:

- Brushed Pewter (BP)
- Matte Black (MBL)
- Oil Rubbed Bronze (ORB)
- White (WH)

Lens: Acrylic

Light Source: 120V/12W/700 lms Del@30K/90 CRI/Dimmable

Notes/Certifications/Warranty:

- 120V
- Pull Chain Standard
- Compatible Fans: LL52-1067 Series
- Remote Control: Adaptable (Sold Separately Part# LLRC-10)
- Wall Control Adaptable (Sold Separately Part# WC-8 | WC-16)
- ETLus Listed for Wet Locations
- CEC JA8 Compliant
- Energy Star Rated
- LED Light: 5 Year Limited Warranty
- 50 Life Hours
- Non-Electrical: 1 Year Limited Warranty



ORDERING INFORMATION

| Model | Finish |
|---------------|------------------------|
| LL1RP69LK-LED | BP MBL ORB WH |

Job Name: _____

Type: _____

Part #: _____

Notes: _____

Downrods







LLDR 1/2" Downrod available in several sizes.

Features:

- 0.5" Diameter Downrod
- Available in 12", 18", 24", 36", 48", 60", and 72"
- Recommended 7" of clearance under ceiling fan blades



| Part # | Finish |
|--------|--------|
| LLDR12 | BN |
| LLDR18 | BLK |
| LLDR24 | WH |
| LLDR36 | ORB |
| LLDR48 | |
| LLDR60 | |
| LLDR72 | |

| Part # | Image | Speeds/ Light Control | Electrical Notes | Notes |
|---|---|---|--|---|
| LLRC-10-AC 3 Speed Hand-held remote control for AC motor ceiling fans |  | <ul style="list-style-type: none"> • 3-speed fan control - Hi, Med, Low, Off • Light control - On-Off, full-range dimming | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • 1.5A Max Load for Ceiling Fan • 300W Max Load for Light • Compatible with LED, CFL and Incandescent Fans <p>Transmitter: Requires 9V Battery (not included)</p> <p>Receiver: 4-DIP Switches; 16 possible combination for multiple fan operation</p> <p>Not Suitable for Multi-Family Units</p> | <p>Dimensions: 4.5" L x 4.5" W x 0.87" W</p> <ul style="list-style-type: none"> • Canopy Wall Mount • White Finish • 3 Wire Installation • Use with CFL and LED Source • Maximum distance is 20 feet • UL Listed for Dry location applications • FCC Certified • 1 Year Limited Warranty  |
| LLWC8-WH 4 Speed Wall Control for Fans with Light Kits |  | <ul style="list-style-type: none"> • 4 Speed Fan Control • Full-range dimming of light | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans | <p>Dimensions: 1.75"W x 4.125"H1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations  |
| LLWC16-WH 3 Speed Wall Control for Fans with Light Kits |  | <ul style="list-style-type: none"> • 3 Speed Fan Control- Hi, Med, Low, Off • On/Off Light Control | <ul style="list-style-type: none"> • 120V/ 60Hz • 3-wire installation • Compatible with LED, CFL and Incandescent Fans | <p>Dimensions: 1.75"W x 4.125"H1.75"W x 4.125"H</p> <ul style="list-style-type: none"> • Installs in a standard single-gang electrical box. • Wall Control must be Mounted Indoors • Not for Multiple Fan Control • cULus Listed for Dry Locations  |