

LL52XXX-5MCT

Slim Recessed LED Downlight with Smooth Trim. Available in 5 Sizes.

Lens: Frosted Polycarbonate
Body Material: Aluminum

Dimensions:

- LL52161-3-5MCT: 3.74"OD x 1.00"MOL
- LL52011-4-5MCT: 5.04"OD x 1.02"MOL
- LL52050-5-5MCT: 6.29" OD x 1.02"MOL
- LL52021-6-5MCT: 7.17"OD x 1.02"MOL
- LL52450-8-5MCT: 8.86"OD x 0.98"MOL

Light Source:


- LL52161-3-5MCT: 120V/8W/480lm Del/90CRI/100° Beam Spread
- LL52011-4-5MCT: 120V/10W/650lm Del/80CRI/100° Beam Spread
- LL52050-5-5MCT: 120V/11W/800lm Del/80CR/100° Beam Spread
- LL52021-6-5MCT: 120V/12W/950lm Del/80CRI/100° Beam Spread
- LL52450-8-5MCT: 120~277v/18w/1600lm 80CRI/110° Beam Spread
- MCT Selectable: 27K, 30K, 35K, 40K,50K

Mounting/Install:

- Includes 13" Driver Connect

Notes/Certification/Warranty:

- Beam Type: Flood
- Dimmable: See list of Preferred Dimmers
- IC Rated
- Not recommended for use with motion sensors, light sensors, timers or any other external controls
- Energy Star Rated
- FCC Rated
- ETL Listed for Wet Locations
- 50K Life Hours
- 5 year Limited Warranty

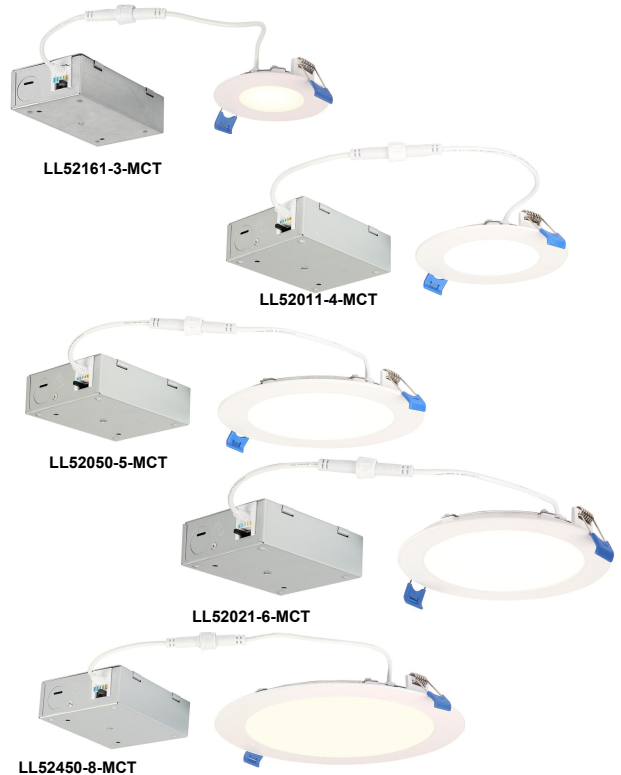

Preferred Dimmers
Eaton: SAL06P-LA-K
Leviton: 011-IPL06-10Z, 012-TSL06-1LW, 001-RDL06-10Z, RNL06-10Z, 002-6674-10W, 001-DW6HD1BZ, 001-DW1KD-1BZ, 001-DSL06-1LZ, R62-06674-P0W, R12-06672-1LW, R50-1PL06-10M
Lutron: DVCL-153PR-WH, CTCL-153PDH-WH, TGCL-153PH-WH, MACL-153MH-WH, P-PKG1W-WH-R

MODEL
LL52161-3-5MCT
LL52011-4-5MCT
LL52050-5-5MCT
LL52021-6-5MCT
LL52450-8-5MCT

Not recommended for use with motion sensors, light sensors, timers or any other external controls. May be available with other voltage, wattage, finish, and cable length options by special order. Please contact your Lumencia Representative for more information