

# LL52XXX-5MCT

Slim Recessed LED Downlight with Smooth Trim. Available in 5 Sizes.

**Lens:** Frosted Polycarbonate  
**Body Material:** Aluminum

**Dimensions:**

- LL52161-3-5MCT: 3.74"OD x 1.00"MOL
- LL52012-4-5MCT: 5.04"OD x 1.02"MOL
- LL52050-5-5MCT: 6.29" OD x 1.02"MOL
- LL52022-6-5MCT: 7.17"OD x 1.02"MOL
- LL52450-8-5MCT: 8.86"OD x 0.98"MOL

**Light Source:**


- LL52161-3-5MCT: 120V/8W/480lm Del/90CRI/100° Beam Spread
- LL52012-4-5MCT: 120V/10W/650lm Del/80CRI/110° Beam Spread
- LL52050-5-5MCT: 120V/11W/800lm Del/80CR/100° Beam Spread
- LL52022-6-5MCT: 120V/12W/950lm Del/80CRI/110° Beam Spread
- LL52450-8-5MCT: 120~277v/18w/1600lm 80CRI/110° Beam Spread
- MCT Selectable: 27K, 30K, 35K, 40K,50K

**Mounting/Install:**

- Includes 13" Driver Connect

**Notes/Certification/Warranty:**

- Beam Type: Flood
- Dimmable: See list of Preferred Dimmers
- IC Rated
- Not recommended for use with motion sensors, light sensors, timers or any other external controls
- Energy Star Rated
- FCC Rated
- ETL Listed for Wet Locations
- 50K Life Hours
- 5 year Limited Warranty

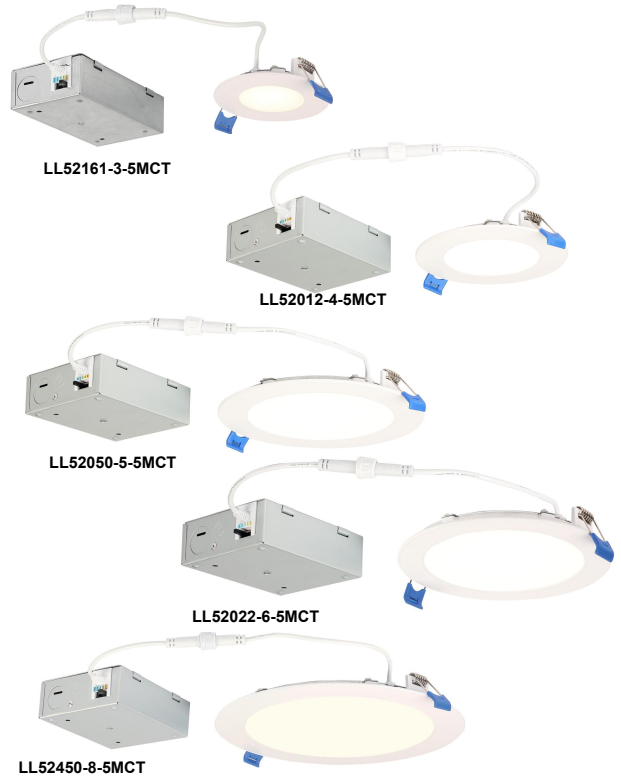

Preferred Dimmers
<b>Eaton:</b> SAL06P-LA-K
<b>Leviton:</b> 011-IPL06-10Z, 012-TSL06-1LW, 001-RDL06-10Z, RNL06-10Z, 002-6674-10W, 001-DW6HD1BZ, 001-DW1KD-1BZ, 001-DSL06-1LZ, R62-06674-P0W, R12-06672-1LW, R50-1PL06-10M
<b>Lutron:</b> DVCL-153PR-WH, CTCL-153PDH-WH, TGCL-153PH-WH, MACL-153MH-WH, P-PKG1W-WH-R

MODEL
LL52161-3-5MCT
LL52012-4-5MCT
LL52050-5-5MCT
LL52022-6-5MCT
LL52450-8-5MCT

LL52011-4-5MCT Replaced with  
 LL52012-4-5MCT 03/2025  
 LL52021-6-5MCT Replaced  
 07/15/2024 with L52022-6-5MCT

Not recommended for use with motion sensors, light sensors, timers or any other external controls.  
 May be available with other voltage, wattage, finish, and cable length options by special order.  
 Please contact your Lumencia Representative for more information