



Job Name: _____

Type: _____

Part #: _____

Notes: _____

LL62-1214-MCT-11SQ

LL62-1216-MCT-14SQ

11" or 14" White Square Puff Fixture. With Optional Motion/Daylight Sensor

Construction: Steel

Lens Material: Poly methyl methacrylate (PMMA)

Dimensions:

LL62-1215-MCT-11SQ: 11.00"SQ x 3.25"H


LL62-1217-MCT-14SQ: 14.00"SQ x 3.25"H

@[\ hGci fW.

LL62-1215-MCT-11SQ: 120V/16W/990-1100lm/90CRI/Dimmable

LL62-1217-MCT-14SQ: 120V/20W/1230-1330lm/90CRI/Dimmable

- MCT: Selectable Color Temp 30K/40K/50K

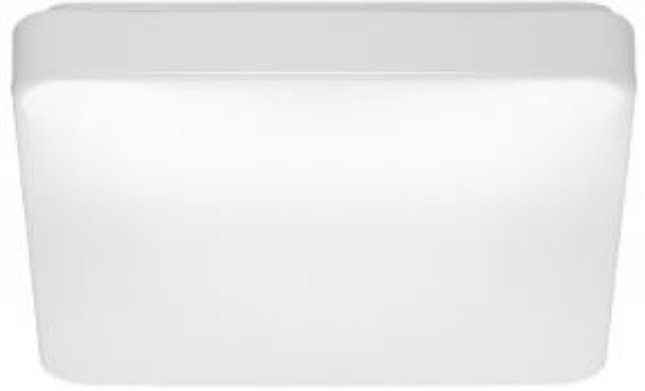

Notes/Certifications/Warranty:

- 120V
- Operating Temperature: -20°C (-4°F) to a maximum of +40°C (+104°F)
- See List of Preferred Dimmers (For Non-MS Versions ONLY)
- cETLus listed for Damp Locations
- Energy Star Rated
- RoHS Compliant
- FCC Compliant
- Clothes Closet Certified - Reg: 410.16 (A)(3) and 410.16 (C)(5)
- 50K Life Hour
- 5 Year Limited Warranty

Motion Sensor (MS) Notes

- Adjustable Detection Area
- Hold Time of 3 Seconds- 30 Minutes
- Daylight Threshold from 50Lux - 2Lux
- Daylight Sensing Can be Disabled
- Non-Dimmable

Preferred Dimmers
Leviton: 66724, 66ELV, DDMX1, DG6HD, DH6HD, DL6HD, DSL06-1LZ, DW6HD, DZ6HD,
Lutron: AYCL-153P, AYCL-253P, DVCL-153P, DVCL-253P, LECL-153P, MACL-153M, MACL-LFQ, MSCL-OP153M, NTCL-250, RCL-153PNL, RRD-6CL, SCL-153P, STCL-153M, TGCL-153PH, TTCL-100H
Eaton: RF9640-ND, VSUL06D
Legrand: RH703PTUTC,



PART #
LL62-1214-MCT-11SQ LL62-1216-MCT-14SQ LL62-1215-MCT-11SQ-MS LL62-1217-MCT-14SQ-MS