

## Dual Head Security

With or without motion sensor Features

Ideal for walkway, patio and entrance lighting. Die-cast aluminum body and heads Impact resistant lenses. White, Black or Bronze finish. UV Stabilized powder coated finish. Recessed junction box required 2KV Surge protection 20 Watts/1900lm/>80CRI 100-277V (without motion sensor). 120V (with motion sensor). Operating temperature -30°C to 50°C 5 Year warranty. 50,000 Hours

### Motion Sensor Specifications

1 Time setting: 10 seconds to 10 minutes

Detection angle: 180°

Detection range: 10 feet to 60 feet

Dusk to dawn feature Manual override



LL65-214BK-UNV-30K





LL65-212BRZ-UNV-30K



LL65-211WH-120V-30K

With integrated motion sensor with adjustable settings

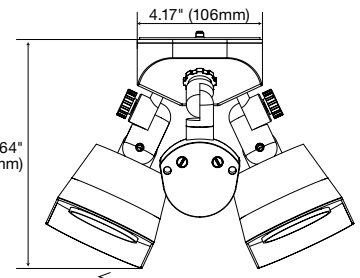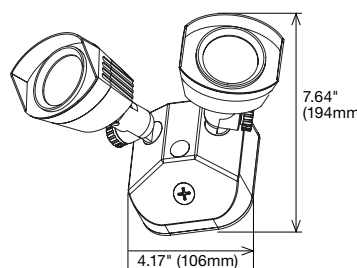

### ORDERING INFORMATION

PART NUMBER	NOTES
LL65-211WH-120V-30K LL65-213BRZ-120V-30K LL65-215BK-120V-30K	120V/20W/1900lms/30K- Includes Sensor 120V/20W/1900lms/30K- Includes Sensor 120V/20W/1900lms/30K- Includes Sensor
LL65-217WH-120V-40K LL65-219BRZ-120V-40K LL65-221BK-120V-40K	120V/20W/1900lms/40K- Includes Sensor 120V/20W/1900lms/40K- Includes Sensor 120V/20W/1900lms/40K- Includes Sensor

PART NUMBER	NOTES
LL65-210WH-UNV-30K LL65-212BRZ-UNV-30K LL65-214BK-UNV-30K	UNV/20W/1900lms/30K- NO Sensor UNV/20W/1900lms/30K- NO Sensor UNV/20W/1900lms/30K- NO Sensor
LL65-216WH-UNV-40K LL65-218BRZ-UNV-40K LL65-220BK-UNV-40K	UNV/20W/1900lms/40K- NO Sensor UNV/20W/1900lms/40K- NO Sensor UNV/20W/1900lms/40K- NO Sensor