

LL85422-6UTD

Ultra Thin LED Downlight with Optional Battery Backup

Materials:

Lens: Frosted Acrylic

Body Material: Durable Aluminium

Dimensions: 6.9"OD x 1.00"OH

Light Source: 120V/14W/884lm Del /90CRI/Dimmable

- Available in 30K or 40K
- TRIAC or ELV Dimming 10-100%

Mounting:



- Spring-loaded retention tabs hold downlight snug to ceiling surface, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- Optional Mounting Plate (**LLPF-6**) or Goof Ring (**LL8542PR**) Available

Optional Battery Backup:

- Factory Installed
- BBU Output: 9W
- BBU Lumen: 9W x L/W

Notes/Certifications/Warranty:

- 120V
- 60Hz
- 120° Beam Angle
- IC Rated for Direct Contact with Batt Type Fiberglass Insulation
- cETLus Listed for Wet Locations
- Energy Star Rated
- CEC JA8 Compliant
- 50K Life Hours
- 5 Year Limited Warranty on LED Light Source
- 1 Year Limited Warranty on All Other Comp

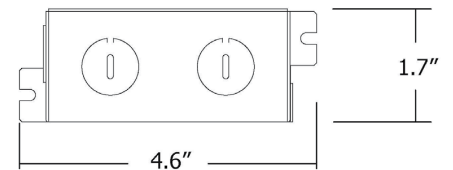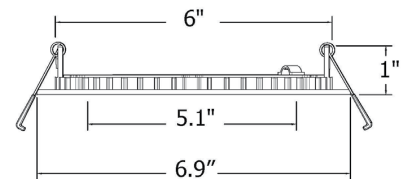

Accessory Mounting Plate Assembly **LLPF-6**



Accessory Goof Ring **LL8542PR**



PART #	Options
LL85422-6UTD-30K LL85422-6UTD-40K	BBU LLPF-6 LL8542PR