

# LL8642-8UTD

## Ultra Thin LED Downlight

**Materials:**

**Lens:** Frosted Acrylic

**Body Material:** Durable Aluminium

**Dimensions:** 8.875"OD x 1.375" OH

**Light Source:** 120V/18W/1150lm Del /90CRI/Dimmable



- Available in 30K or 40K
- TRIAC or ELV Dimming 10-100%

**Mounting:**

- Simple installation with hinged, off-board driver/ junction box, poke-in connectors, and linkable connector cable
- Spring-loaded retention tabs hold downlight snug to ceiling surface

**Notes/Certifications/Warranty:**

- 120V
- 60Hz
- 120° Beam Angle
- IC Rated for Direct Contact with Batt Type Fiberglass Insulation
- cETLus Listed for Wet Locations
- Energy Star Rated
- 50K Life Hours
- 5 Year Limited Warranty on LED Light Source
- 1 Year Limited Warranty on All Other Components

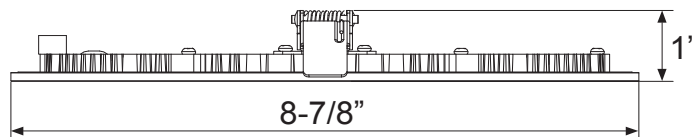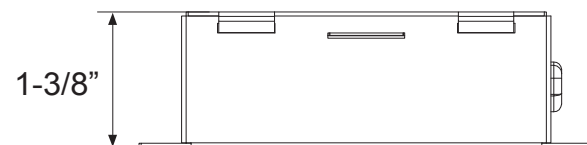

<b>PART #</b>
<b>LL8642-8UTD-30K</b> <b>LL8642-8UTD-40K</b>