

LLARCHLIN4

LED SUSPENDED ARCHITECTURAL LINEAR

FEATURES:

- Aluminum extruded housing.
- 4' Length
- Field AB switching is standard (CCT, up/down control).
- White .
- Operating temperature: -4°F ~ 122°F (-20°C ~ 50°C)

MOUNTING:

- Adjustable Aircraft Cable pendant mount (AAC120 standard).

LENS:



- PC frosted lens for both up and down.
- Beam angle 120°.

LED/ELECTRICAL:


- 50 Watt Input, 5500lm Output. 110 lm/W
- CRI >80
- Field adjustable CCT: 3000/3500/4000K
- Max. 50W total (selectable 35W down, 35W/15W up/down, or 15W up)
- 0-10V dimming to 5% .
- 120-347Vac, 50/60Hz
- THD: <20%
- PF : >0.9
- Class 2
- Operating temperature: 4°F ~ 122°F (-20°C ~ 50°C)

LISTING:

- ETL listed.
- Suitable for damp & dry location.
- 5 years limited warranty.
- L70: >50,000 hours

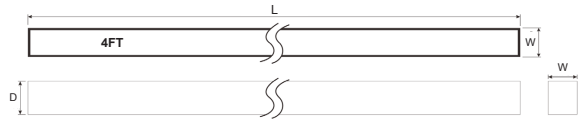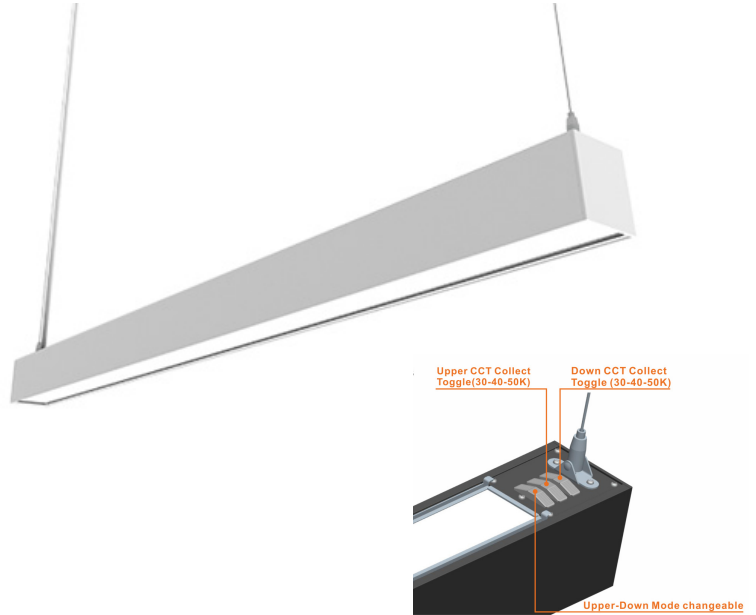

Length: 47.48 (1206)
Width: 2.75 (70)
Depth: 3.15 (80)
All dimensions are in inches (millimeters).

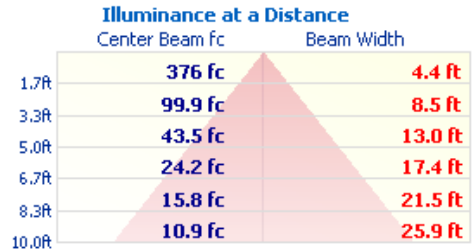

■ Horiz. Spread: 104.7°

ORDERING INFORMATION

MODEL	LED ¹	COLOR TEMP. ¹	VOLTAGE	FINISH	CEILING TYPE	SUSPENSION LENGTH
LLARCHLIN4	3515L D35W, U15W	MCT Selectable 30/35/40K	UNV 120-347V	WH Glossy White RAL#9010 Black and Silver may be available by Special Order	TC T-bar ceiling HC Hard ceiling	AAC48 Adjustable Aircraft Cable Canopy 48"L AAC96 Adjustable Aircraft Cable Canopy 96"L AAC120 Adjustable Aircraft Cable Canopy 120"L (Std.) * Contact factory for custom length.

OPTIONS	
EMG8R	Remote EM 1296 LUMEN
EMG15R	Remote EM 2430 LUMEN
EMG20R	Remote EM 3240 LUMEN

NOTES:
1. Default setting is 15W up + 35W down, 3500K.