



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LLB11Q

Side Light Bollard provides full cutoff lighting for outdoor path, walkways and landscape areas using asymmetric optics designed to replace outdated Halogen and Compact Fluorescent lighting systems. These fixtures are ideal for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities.

## Specifications and Features:

**Housing:** Cast and Extruded Aluminum Housing with Flush Mounting Base, Flat Top.

**Lens:** Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

**Finish:** Textured Architectural Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**Mounting Options:** Mounting Kit with 8" Zinc-Plated Anchor Bolts, Included.

**Optics:** Asymmetric

**EasyLED LED:** Aluminum Boards

**Wattage:** 18w: Array: 18w, System: 20.5w

**L<sub>70</sub>:** 25° 147,000 Hours

**Dimming:** 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.


**Driver:** Electronic Driver, 120-277V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV.

**Listing & Ratings:** **ETL:** ETL: Listed for Wet Locations, ANSI/UL 1598, 8750; IP66 Sealed LED Compartment.

**Warranty:** 5-Year Warranty for -40°C to +40°C Environment.



Shown with GFCI

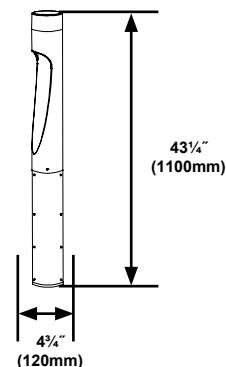

## ORDERING INFORMATION

Model	Color Temperature	Finish	Options
LLB11Q: Side Light Bollard	30K 40K 50K	BRZ: Bronze BLK: Black PLA: Platinum CC: Custom Color	SF: Single Fuse* DF: Double Fuse* SP: Surge Protection GF1: GFCI Outlet, 15A, 120V  *120-277V Models Only.




Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Photometric Data

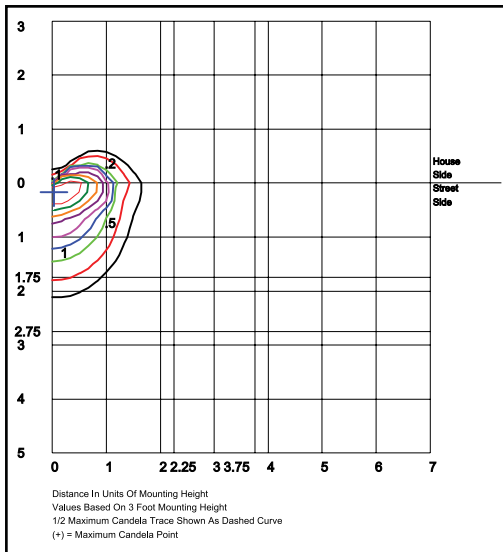

### LLB11Q50K

Grid in feet, Mounting Height = 3 ft.

### Photometric Performance

Wattage (Catalog Logic)		18W (1X18)
Input Watts		20.5W
Optic	CCT	Delivered Lumens
F= Asymmetric	3000K	311
	4000K	324
	5000K	337
	BUG Rating	B0-U0-G0