

## LLBRK-LEDE56 Economy 5" & 6" Recessed Downlight

STANDARD



Economy 5" & 6" Recessed downlight retrofit solution with integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 5" & 6" recessed cans.



SILVER AND WHITE

BAFFLE

### PERFORMANCE:

- Voltage: 120V
- Power Consumption: 12w
- CRI: 80
- Color Temperature: See Ordering Information for available color Temperatures
- Lumens: See Ordering Information for Lumens
- Dimming: 10% with most dimmers
- Operating temperature: -20 C- 40C (-4F – 104F)

# DISCONTINUED


### WARRANTY/LISTING

- Tested in accordance with IESNA LM79 & LM80
- ETL Listed for Wet Locations
- Passes FCC Class B
- ROHS Compliant
- Five Year warranty

### NOTES

- Compatible with most 5" and 6" housings.
- Durable thermoplastic construction, no tools required for installation.
- Quick connect wiring; includes E26 Socket Adapter.
- Suitable for use in ICAT recessed housings.
- Trimplate accessories available for changing finishes or outline

### DIMENSIONS

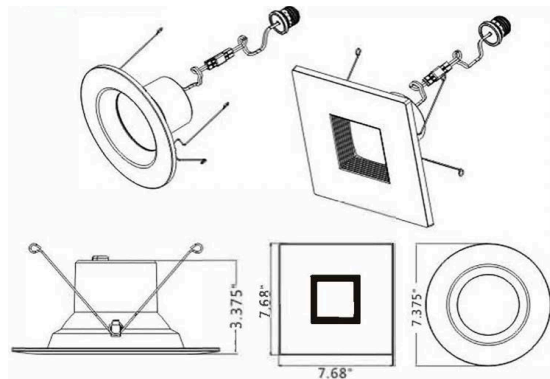

### ORDERING INFORMATION

MODEL	VOLTAGE/WATTAGE/CRI/ COLOR TEMP/LUMENS/ CERTIFICATION	ACCESSORIES (Snap in Trimplate)
LLBRK-LEDE56-BW-27K-ECO-V2	120V/12W/80CRI/27K/800LM/NA	LLLED56-TRMPLT-ECO-SQ(Square White)
LLBRK-LEDE56-BW-3K-ECO-V2	120V/12W/80CRI/30K/820LM/NA	LLLED6A-TRMPLT-ECO-SPWHT (Round White with Silver Baffle)
LLBRK-LEDE56-BW-35K-ECO-V2	120V/12W/80CRI/35K/830LM/NA	LLLED6A-TRMPLT-ECO-BK (Round Black)
LLBRK-LEDE56-BW-4K-ECO-V2	120V/12W/80CRI/40K/840LM/NA	LLLED6A-TRMPLT-ECO-N (Round Nickel)
LLBRK-LEDE56-BW-5K-ECO-V2	120V/12W/80CRI/50K/860LM/NA	LLLED6A-TRMPLT-ECO-BZ (Round Bronze)