

LLCR201-L20-BLK

Outdoor Bollard in Black with a Clear Polycarbonate Lens

Performance:



- 100-277V, 50/60Hz
- 20w/1522lm
- Max 20kA Surge Suppression
- 3000K or 4000K CCT 80CRI
- 0 - 10V Dimming

Construction:

- Black Powder Coated Finish
- Aluminum Housing
- Polycarbonate Lens
- Mounting Hardware Included

Notes/Certifications/Warranty:

- Hardware and Template is included.
- Minimum Starting Temp -20°F
- ETL Listed for Wet Locations
- Estimated 50,000 Hrs L₇₀
- 5 Year Warranty

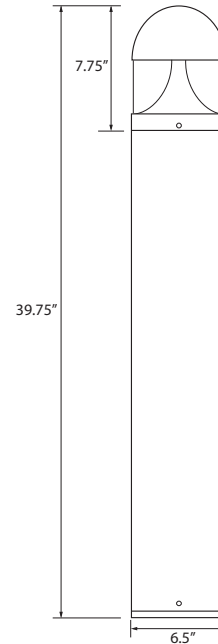

Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)

LENS	CCT
LLCR201-L20-BLK	W- 30K C-40K