



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## ACCESSORIES

### Remote Mount Emergency Drivers\*

LEDEM-CP-800	=	Emergency driver
LEDEM-CP-1200	=	Emergency driver
LEDEM-CP-1600	=	Emergency driver
LEDEM-CP-2000	=	Emergency driver
LEDEM-CP-2400	=	Emergency driver
LEDEM-CP-800-CEC	=	Emergency driver - CEC listed
LEDEM-CP-1200-CEC	=	Emergency driver - CEC listed
LEDEM-CP-1600-CEC	=	Emergency driver - CEC listed
LEDEM-CP-2000-CEC	=	Emergency driver - CEC listed
LEDEM-CP-2400-CEC	=	Emergency driver - CEC listed

\*Emergency drivers must be remote mounted.

## EMERGENCY DRIVERS – PERFORMANCE DATA

Emergency Driver Part Number	BLEDEM-CP-800		BLEDEM-CP-1200		BLEDEM-CP-1600		BLEDEM-CP-2000		BLEDEM-CP-2400		Runtime
	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	Watts	EM Lumens	
LLCSLEDSS-2FT-20-xKMV-ET	5.0	650	7.8	1014	10.7	1391	13.7	1781	17.0	2210	90 MINS.
LLCSLEDSS-3FT-25-xKMV-ET	5.0	650	7.8	1014	10.7	1391	13.7	1781	17.0	2210	
LLCSLEDSS-4FT-35-xKMV-ET	5.0	650	7.8	1014	10.7	1391	13.7	1781	17.0	2210	
LLCSLEDSS-8FT-65-xKMV-ET	5.0	650	7.8	1014	10.7	1391	13.7	1781	17.0	2210	

## COMPATIBLE DIMMERS

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
Lutron	DVSTV	10%-100%	450W
Leviton	IP710-LFZ	10%-100%	1200W
General Protecht	DMD-LED3-102	10%-100%	600W

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## ELECTRICAL

Model	Color Temp.	CRI <sup>1</sup>	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage <sup>2</sup>	Input Current (A)			Power Factor	THD <sup>3</sup>	L <sub>70</sub> Hours <sup>4</sup>
							120V	240V	277V			
LLCSLEDSS-2FT-20-35KMV-ET	3500k	> 80	2,582	20	132	120-277	0.17	0.08	0.07	> 90%	< 20%	122,000
LLCSLEDSS-2FT-20-4KMV-ET	4000k	> 80	2,592	20	133	120-277	0.17	0.08	0.07	> 90%	< 20%	122,000
LLCSLEDSS-2FT-20-5KMV-ET	5000k	> 80	2,613	19	134	120-277	0.16	0.08	0.07	> 90%	< 20%	122,000
LLCSLEDSS-3FT-25-35KMV-ET	3500k	> 80	3,138	25	127	120-277	0.21	0.10	0.09	> 90%	< 20%	122,000
LLCSLEDSS-3FT-25-4KMV-ET	4000k	> 80	3,154	25	129	120-277	0.21	0.10	0.09	> 90%	< 20%	122,000
LLCSLEDSS-3FT-25-5KMV-ET	5000k	> 80	3,186	24	131	120-277	0.20	0.10	0.09	> 90%	< 20%	122,000
LLCSLEDSS-4FT-35-35KMV-ET	3500k	> 80	4,278	33	128	120-277	0.28	0.14	0.12	> 90%	< 20%	122,000
LLCSLEDSS-4FT-35-4KMV-ET	4000k	> 80	4,313	33	129	120-277	0.28	0.14	0.12	> 90%	< 20%	122,000
LLCSLEDSS-4FT-35-5KMV-ET	5000k	> 80	4,382	33	131	120-277	0.28	0.14	0.12	> 90%	< 20%	122,000
LLCSLEDSS-8FT-65-35KMV-ET	3500k	> 80	8,129	62	131	120-277	0.52	0.26	0.22	> 90%	< 20%	122,000
LLCSLEDSS-8FT-65-4KMV-ET	4000k	> 80	8,131	62	132	120-277	0.52	0.26	0.22	> 90%	< 20%	122,000
LLCSLEDSS-8FT-65-5KMV-ET	5000k	> 80	8,135	62	132	120-277	0.52	0.26	0.22	> 90%	< 20%	122,000

<sup>1</sup> Color rendering index.

<sup>2</sup> All 50-60Hz.

<sup>3</sup> Total harmonic distortion.

<sup>4</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM21-11 calculated hours.

## PHOTOMETRIC DATA

### LLCSLEDSS-2FT-20-35KMV-ET


#### Luminaire Data

Description	2' Slim Strip 35K
Total Lumens	2,604
Input Wattage	20
Efficacy (lm/W)	132
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.24

#### Zonal Lumen Summary

Zone	Lumens	%Fixt	Zone	Lumens	%Fixt
0-20°	265	10.2%	60-80°	527	20.2%
0-30°	562	21.6%	70-80°	227	8.7%
0-40°	920	35.3%	80-90°	156	6.0%
0-60°	1,651	63.4%	90-110°	172	6.6%
0-80°	2,178	83.6%	90-120°	216	8.3%
0-90°	2,334	89.6%	90-130°	242	9.3%
10-90°	2,265	87.0%	90-150°	265	10.2%
20-40°	655	25.2%	90-180°	270	10.4%
20-50°	1,032	39.6%	110-180°	98	3.8%
40-70°	1,031	39.6%	0-180°	2,604	100.0%

180° Polar Graph

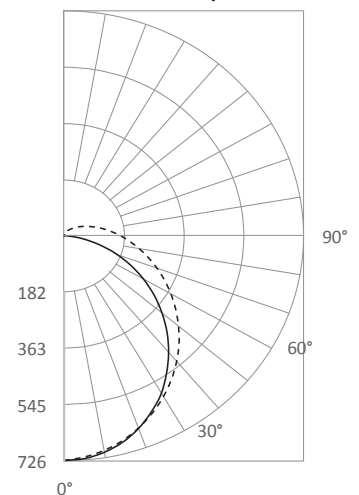

Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

## PHOTOMETRIC DATA

### LLCSLEDSS-3FT-25-35KMV-ET


#### Luminaire Data

Description	3' Slim Strip 35K
Total Lumens	3,161
Input Wattage	25
Efficacy (lm/W)	128
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.3

#### Zonal Lumen Summary

Zone	Lumens	%Fixt	Zone	Lumens	%Fixt
0-20°	330	10.4%	60-80°	641	20.3%
0-30°	700	22.1%	70-80°	273	8.6%
0-40°	1,146	36.3%	80-90°	181	5.7%
0-60°	2,051	64.9%	90-110°	188	5.9%
0-80°	2,692	85.2%	90-120°	232	7.3%
0-90°	2,872	90.9%	90-130°	258	8.1%
10-90°	2,787	88.2%	90-150°	281	8.9%
20-40°	816	25.8%	90-180°	289	9.1%
20-50°	1,283	40.6%	110-180°	101	3.2%
40-70°	1,272	40.3%	0-180°	3,161	100.0%

180° Polar Graph

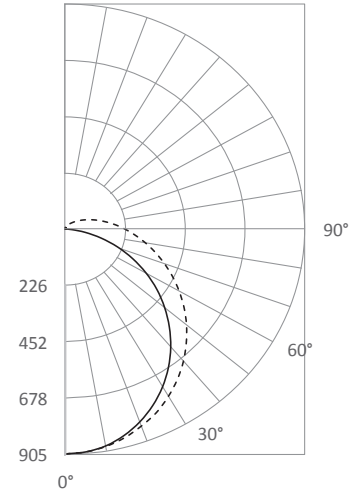

### LLCSLEDSS-4FT-35-35KMV-ET

#### Luminaire Data

Description	4' Slim Strip 35K
Total Lumens	4,293
Input Wattage	33
Efficacy (lm/W)	129
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.3

#### Zonal Lumen Summary

Zone	Lumens	%Fixt	Zone	Lumens	%Fixt
0-20°	448	10.4%	60-80°	869	20.2%
0-30°	949	22.1%	70-80°	371	8.6%
0-40°	1,554	36.2%	80-90°	245	5.7%
0-60°	2,782	64.8%	90-110°	255	5.9%
0-80°	3,651	85.0%	90-120°	316	7.4%
0-90°	3,895	90.7%	90-130°	352	8.2%
10-90°	3,779	88.0%	90-150°	386	9.0%
20-40°	1,106	25.8%	90-180°	398	9.3%
20-50°	1,740	40.5%	110-180°	142	3.3%
40-70°	1,726	40.2%	0-180°	4,293	100.0%

180° Polar Graph

