

LLCV304


12" Square Canopy Luminaire with a Die Cast Aluminum Body and Prismatic Polycarbonate Diffuser with UV Inhibitors

Finishes: Bronze (BRZ), White (WH), Black (BLK), Silver (SL) and Custom Colors (CC)

Dimensions: 12.375"SQ x 6.25"E

Notes/ Certifications/Warranty

- Universal Voltage- 120-277V Standard
- Type VS Distribution
- Power Factor >0.90 - THD <20
- Can be Directly Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry
- DLC Listed
- Buy American Act Compliant
- cETLus Listed for Wet Locations
- IP-65 Rated
- Standard Operating Temperature -20°C to 40°C. 0°C -40°C with EM Pack Option
- 5 Year Warranty

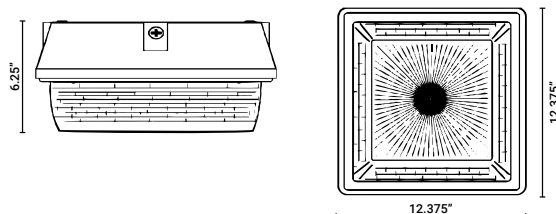

Nominal Wattage	System Wattage	CCT	Lumens	Efficacy	DLC 5.0V Listing
24W	23.54	3000K	2,875.45	122.15	PREMIUM
24W	23.54	4000K	2,961.71	125.82	PREMIUM
24W	23.54	5000K	3,050.57	129.59	PREMIUM
36W	34.27	3000K	4,186.14	122.15	PREMIUM
36W	34.27	4000K	4,311.72	125.82	PREMIUM
36W	34.27	5000K	4,441.07	129.59	PREMIUM
48W	46.60	3000K	5,692.27	122.15	PREMIUM
48W	46.60	4000K	5,863.04	125.82	PREMIUM
48W	46.60	5000K	6,038.93	129.59	PREMIUM
60W	56.83	3000K	6,941.88	122.15	PREMIUM
60W	56.83	4000K	7,150.14	125.82	PREMIUM
60W	56.83	5000K	7,364.64	129.59	PREMIUM
72W	67.26	3000K	8,215.92	122.15	STANDARD
72W	67.26	4000K	8,462.40	125.82	PREMIUM
72W	67.26	5000K	8,716.27	129.59	PREMIUM

PART #	WATTAGE	CCT	FINISH	OPTIONS & ACCESSORIES
LLCV304	24W 36W 48W 60W 72W	27K 30K 35K 40K 50K 57K	BRZ-Bronze (Standard) WH-White BLK- Black SL- Silver CC- Custom Color	MS-Motion Sensor MS-D2- Motion Sensor with Bi-level Dimming D1- 0-10V Dimming D2- Step Dimming (120V Only) EM-Emergency Battery Pack V1*-480/347V INPUT (120-277V Standard) <small>*NOT AVAILABLE WITH EM, PHOTOCELL OR MOTION SENSOR</small>

When specifying options, please check with your Lumencia rep for availability and lead time. Please note any finish other than Bronze (BRZ) is non-cancelable and nonreturnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable.