

## LLDC102


9" LED Wallpack with a Die Cast Aluminum Body and Prismatic Borosilicate Glass Lens.

**Finishes:** Bronze (BRZ), White (WH), Black (BLK), Silver (SL) and Custom Colors (CC)

**Dimensions:** 8.75"L x 8.75"H x 9.25"E

### Notes/ Certifications/Warranty

- Universal Voltage- 120-277V Standard
- Power Factor >0.90 - THD <20
- Type IV Distribution
- Can be Surface Mounted over an Existing 4" Outlet Box or Surface Wired through a 1/2" Conduit Entry
- Additional Conduit entries Available for Photocells & other Components
- Buy American Act Compliant
- DLC Listed
- cETLus Listed for Wet Locations
- IP-65 Rated
- Standard Operating Temperature -20°C to 40°C.
- 5 Year Warranty

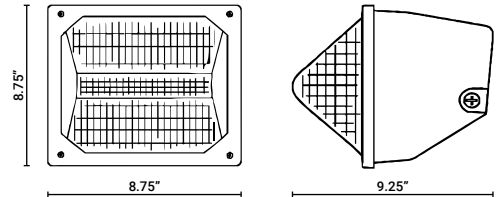

Nominal Wattage	System Wattage	CCT	Lumens	Efficacy	DLC 5.0V Listing
12W	12.72	3000K	1,393.50	109.55	NONE
12W	12.72	4000K	1,463.18	115.03	NONE
12W	12.72	5000K	1,536.33	120.78	NONE
24W	23.57	3000K	2,787.00	118.24	NONE
24W	23.57	4000K	2,926.35	124.16	NONE
24W	23.57	5000K	3,072.67	130.36	STANDARD
36W	34.27	3000K	4,180.50	121.99	STANDARD
36W	34.27	4000K	4,389.53	128.09	STANDARD
36W	34.27	5000K	4,609.00	134.49	STANDARD

PART #	WATTAGE	CCT	FINISH	OPTIONS & ACCESSORIES
LLDC102	12W 24W 36W	27K 30K 35K 40K 50K 57K	BRZ-Bronze (Standard) WH-White BLK- Black SL- Silver CC- Custom Color	PC1-120V Photocell PC2-208/277V Photocell MS-Motion Sensor MS-D2- Motion Sensor with Bi-level Dimming D1- 0-10V Dimming D2- Step Dimming (120V Only) V1*-480/347V INPUT (120-277V Standard) <small>*NOT AVAILABLE WITH PHOTOCCELL OR MOTION SENSOR</small>

*When specifying options, please check with your Lumencia rep for availability and lead time. Please note any finish other than Bronze (BRZ) is non-cancelable and nonreturnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable.*