

**LLDC220D**  
**LLDC221D**  
**LLDC222D**

**Ceiling Fixture in Satin Nickel with Sanded Glass Shade**

**Dimensions:**


- **LLDC220D:** 10.5"OD x 2.6"H
- **LLDC221D:** 15.0"OD x 2.6"H
- **LLDC222D:** 19.0"OD x 2.6"H

**Light Source:**

- **LLDC220D:** UNV/17W/1320lm Del@30k/80CRI. Non-Dimming Standard TRIAC AND 0-10V Dimming Optional
- **LLDC221D:** UNV/23W/1900lm Del@30k/80CRI. Non-Dimming Standard 0-10V Dimming Optional
- **LLDC222D:** UNV/25W/2670lm Del@30k/80CRI. Non-Dimming Only

**Notes/Certification/Warranty**

- UNV= Universal Voltage 120-277V
- MCT Available: Selectable Color Temp 30K, 35K and 40K
- AAC: Adjustable Aircraft Cable Adds Up To 6'
- ETL/cETL Listed for Damp Locations
- Energy Star Rated
- 5 Years Limited Warranty on Driver and LED
- 1 Year Warranty on Frame and Lens from Defects.

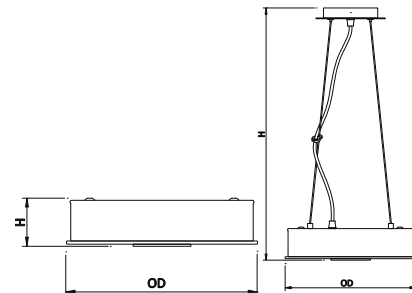

**ORDERING INFORMATION**

	Color Temp	Finish	Options
LLDC220D <sup>^</sup> LLDC221D	30K <sub>(STD)</sub> 40K <sub>(STD)</sub> MCT*	SN <sub>(STD)</sub> CC*	TRIAC: TRIAC Dimming <sup>^</sup> 010V: 0-10V Dimming AAC: Adjustable Aircraft Cables
LLDC222D**	30K <sub>(STD)</sub> 40K <sub>(STD)</sub> MCT <sub>(STD)</sub>		

\*\*No Dimming Options for LLC222D

<sup>^</sup>TRIAC Dimming Available for LLDC220D Only

\* Special Order- MOQ and Longer Lead Times may Apply. May be available with other voltage, wattage, and finish options by special order. Please contact your Lumencia Representative for more information.