

Job Name: _____

Type: _____

Part #: _____

Notes: _____

LLDCSHM-UD


18" Half-Moon LED Up and Downlight Wallpack with a Die Cast Aluminum Body and Impact Resistant Glass Lens

Finishes: Bronze (BRZ), White (WH), Black (BLK), Silver (SL) and Custom Colors (CC)

Dimensions: 18.00"L x 7.125"H x 9.00"E

Notes/ Certifications/Warranty

- Universal Voltage- 120-277V Standard
- Power Factor >0.90 - THD <20
- 4" x 4" Gasketed Wall Plate allows the Installer to Quickly Mount and Wire the Fixture without Opening the Housing
- Buy American Act Compliant
- cETLus Listed for Wet Locations
- IP-65 Rated
- Standard Operating Temperature -20°C to 40°C. 0°C -40°C with EM Pack Option
- 5 Year Warranty

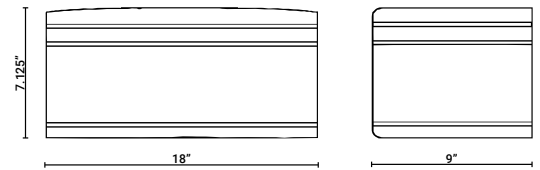

Nominal Wattage	System Wattage	CCT	Lumens	Efficacy
24W	23.68	3000K	2,802.00	118.33
24W	23.68	4000K	2,942.10	124.24
24W	23.68	5000K	3,089.21	130.46
36W	34.27	3000K	4,203.00	122.64
36W	34.27	4000K	4,413.15	128.78
36W	34.27	5000K	4,633.81	135.21
48W	46.60	3000K	5,604.00	120.26
48W	46.60	4000K	5,884.20	126.27
48W	46.60	5000K	6,178.41	132.58
60W	56.83	3000K	7,005.00	123.26
60W	56.83	4000K	7,355.25	129.43
60W	56.83	5000K	7,723.01	135.90
72W	69.48	3000K	8535.00	118.54
72W	69.48	4000K	8961.75	124.46
72W	69.48	5000K	9409.84	130.69

PART #	WATTAGE UP	WATTAGE DOWN	CCT	FINISH	OPTIONS & ACCESSORIES
LLDCSHM-UD	12W	12W 24W 36W 48W 60W	27K 30K 35K 40K 50K 57K	BRZ-Bronze (Standard) WH-White BLK- Black SL- Silver CC- Custom Color	MS-Motion Sensor MS-D2- Motion Sensor with Bi-level Dimming D1- 0-10V Dimming D2- Step Dimming (120V Only) EM-Emergency Battery Pack V1*-480/347V INPUT (120-277V Standard) <small>*NOT AVAILABLE WITH EM, PHOTOCCELL OR MOTION SENSOR</small>

When specifying options, please check with your Lumencia rep for availability and lead time. Please note any finish other than Bronze (BRZ) is non-cancelable and nonreturnable. Any modified product, any selected options added to standard products, deem order non-cancelable and non-returnable.