



LLDR-5MCT

Double-Ring, Surface Mounted Fixture in Brushed Nickel. Available in 12", 14" and 16".

Construction:

Body Material: Steel Housing

Lens: Plastic Diffuser

Mounting: Surface Mounting and Retrofit Installation

Dimensions:

- **LLDR-12-5MCT:** 11.81"OD x 3.54"E
- **LLDR-14-5MCT:** 13.78"OD x 3.54"E
- **LLDR-16-5MCT:** 15.75"OD x 3.54"E

Wattage/Lumen Output:

- **LLDR-12-5MCT:** 120V/17w/1,200lm/5MCT*/90CRI/Dimmable
- **LLDR-14-5MCT:** 120V/22w/1,800lm/5MCT*/90CRI/Dimmable
- **LLDR-16-5MCT:** 120V/26w/2,000lm/5MCT*/90CRI/Dimmable
- Field Selectable 5MCT: 27K, 30K, 35K, 40K and 50K
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 139,000 hours of operation.**
- Input transient surge protection = 0.5kV.

• Dimming: TRIAC Dimming. *Lumencia recommends the use of a UL or ETL LED Ready Dimmer. Please contact Lumencia for a complete list of compatible dimmers. Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. We recommend testing dimmers prior to installation for larger projects.*

Notes/Certifications/Warranty:

- 120V
- This device is not intended for use with emergency exits.
- cETLus listed for damp locations.
- Title 24 qualified.
- Complies with FCC Part 15, class B.
- 5-year warranty on all electronics and housing.




Job Name:

Type:

Part #:

Notes:

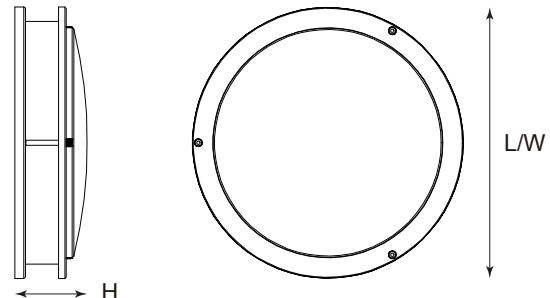

ORDERING INFORMATION

Part

LLDR-12-5MCT
LLDR-14-5MCT
LLDR-16-5MCT

Cut Updated 05/2025
Replaces the LLDR-10-MCT,
LLDR-14-MCT, LLDR-18-MCT