

LLEDSLXXW

LED Landscape Security/Flood Light available in 3 Wattages.

Die Cast Aluminum Housing, and a Polycarbonate Lens with Seamless Silicone Gasket.

Notes:

- Power factor > 0.90.
- Total harmonic distortion 20%.
- Color rendering index > 80.
- Ambient Operating Temperature -20 C to 40 C / -4 F to 104 F

Dimensions:

- LLEDSL15W: 5.250"H x 3.000"W x 4.250"E
- LLEDSL28W: 7.625"H x 3.875"W x 5.750"E
- LLEDSL42W: 8.250"H x 4.250"W x 6.250"E

Light Source:

- LLEDSL15W: UNV/15w/1536lm Delivered@30k/80CRI
Beam Spread: 30 Narrow
- LLEDSL28W: UNV/28w/2724lm Delivered@30k/80CRI
Beam Spread: 30 Narrow
- LLEDSL42W: UNV/42w/4201lm Delivered@30k/80CRI
Beam Spread: 30 Narrow

Certification/Warranty:


- cULus listed for wet locations
- IP65 rated.
- DLC approved.
- Complies with EN61000 4 5, surge immunity test (1kV).
- 5 year warranty on all electronics and housing.



Spike-Mount (LEDSL-BS)



Shroud (LEDSL-SHROUD)

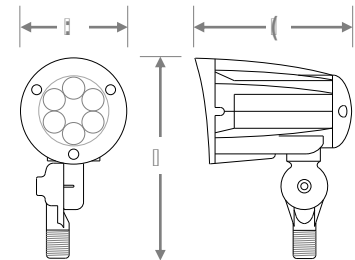

Model	Part #	Part #
?	?	
?	?	
?		

EFBLSL

ELSLSL

?

Job Name: _____

Type: _____

Part #: _____

Notes: _____