

Job Name: _____

Type: _____

Part #: _____

Notes: _____

LLEZRXTEU

COMPACT THERMOPLASTIC EXIT SIGN

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

ORDERING INFORMATION

Model Number: LLEZRXTEU


Enter the product specs above.



WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

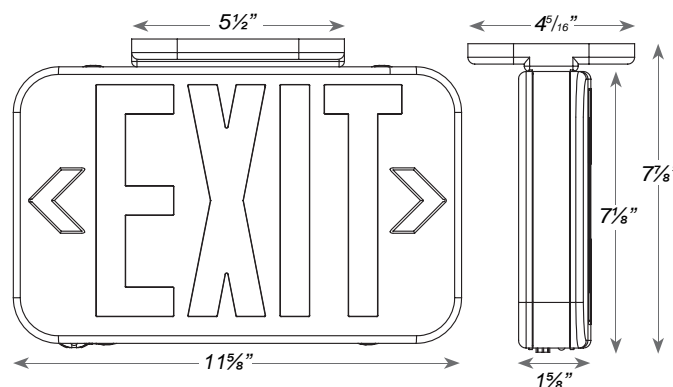

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
LLEZRXTEU	2 Universal Single/Double Face	R Red	W White	(Blank)
		G Green	B Black	EM Battery Back

Job Name: _____


Type: _____

Part #: _____

Notes: _____

WIRE GUARD


- Durable 9-gauge steel construction.
- Mounting hardware provided for easy field installation.

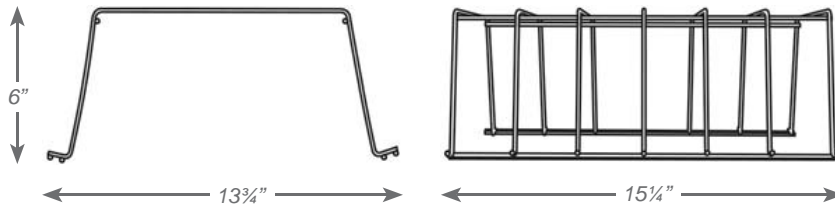

WG-1

HOUSING / MOUNTING

- High-impact resistant polycarbonate material.
- Mounting hardware provided for easy installation in the field.

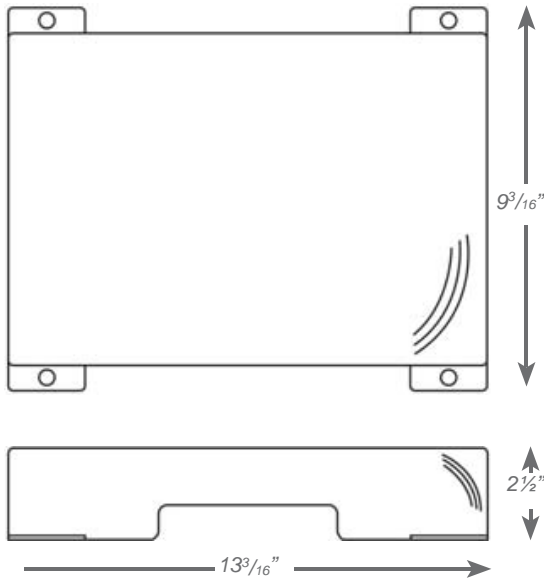

PSC-1