

## LLFA28X Series

Acorn Head in 2 Sizes

### Integrated LED:

- 120~277v, 50/60Hz
- Driver: UL Class2, Power Factor >.90
- Type V Distribution
- Ambient Operating Temperature:-40°C(-40°F) to +40°C(105°F)
- Integral Surge Suppression with option for Ground Surge Suppression

### Retrofit E39 and E26


- Requires 120~277V 200 Watt Max Lamp (not included)
- Lumencia offers LED E39 lamps.

### Construction:

- Cast Aluminum with Stainless Steel Hardware.
- Polyester PowderCoat.
- Choice of Globes
- Fits Standard 3" Poles.

### Certifications:

- UL Listed for Wet Locations
- Buy American Act Compliant
- RoHS

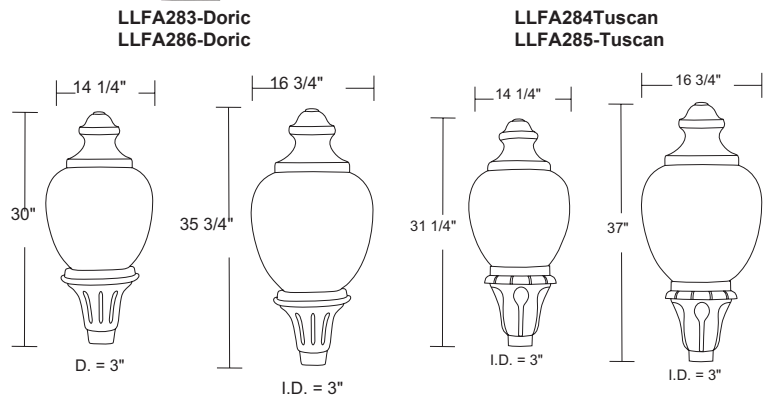

### Integrated LED

- 50,000 Hour Estimated Life
- 5 Year Warranty

Part #	EPA (FT2)	Weight (LBS)	Back	Uplight	Glare
LLFA283- D	0.735	18	2	3	2
LLFA284-T	0.735	18	2	3	2
LLFA285-T	1.08	18	2	3	2
LLFA286-D	1.085	18	2	3	2

PART #	LIGHT SOURCE	CCT	FINISH	GLOBE	OPTIONS
LLFA283-D LLFA284-T LLFA285-T LLFA286-D	L4000: 40W 4000lm L6000: 60W 6000lm	40K(Standard) 30K(Special Order) 50K(Special Order)	BLK-Black WHT-White (Special Order) BRZ-Bronze (Special Order)	P- Clear Textured Polycarbonate W- White Textured Acrylic C- Clear Textured Acrylic F- Frost Textured Acrylic	F-Acorn Finial Topper

Ask about 0-10v Dimming



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_