

LLFB155

LLFB156

Exterior Wall Lantern in 2 profiles. Available in 2 colors and 2 light sources with 3 diffuser options.

Construction: Composite Resin Construction makes for no rust or corrosion.

Finishes: Black (BLK) and White (WH)

Light Source:


- **LLFB155-LE8-30K:** and **LLFB156-LE8-30K:**
120V/13W/80CRI/1140LM@30K/TRIAC
- **LLFB155-LE8-40K:** and **LLFB156-LE8-40K:**
120V/13W/80CRI/1280LM@40K/TRIAC
- **LLFB155-MB:** and **LLFB156-MB:** Requires 1 x 120V/60W Max Medium Base Lamp. *(Not Included)*

Notes/Certification/Warranty:


- Optional Photocell
- Matching Post Top LLFB255
- Assembled in the USA
- LED Operating Temperature -40°C to +40°C
- Energy Star Listed when fitted with the LE Light Source
- RoHS Compliant
- UL Listed For Wet Locations
- 5 Year Warranty on LES and LE12 Versions
- 1 Year Warranty on Medium Base Version



LLFB155

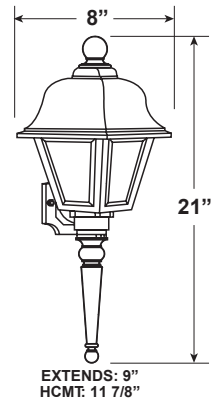

LLFB156

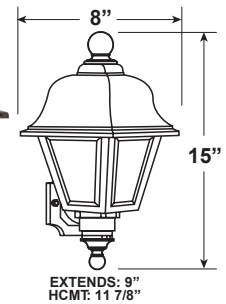

PART #	COLOR TEMP.	FINISH	DIFFUSER	OPTIONS
LLFB155-LE8 LLFB156-LE8	30K 40K	BLK WH	<i>Acrylic</i> C-Clear Prism W-White F-Glare Free Frost	P-Photocell

*LE8 Version is Energy Star Rated

Recommended Dimmers for LE8: LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P

PART #	FINISH	DIFFUSER	OPTIONS
LLFB155-MB^ LLFB156-MB^	BLK WH	<i>Acrylic</i> C-Clear Prism W-White F-Glare Free Frost	P-Photocell NL-No Lamp LWE ¹ -120v/9.5w/800lm@30K/80CRI LCE ¹ -120v/9.5w/800lm@40K/80CRI <small>¹LWE and LCE Medium Base Lamps are available for purchase with the I160 Light Source. UL Listed. Energy Star. TRIAC Dimming. Rated for 15,000 Hours. 3 Year Limited Warranty.</small>

^ Requires MOQ of 50 Pieces

Recommended Dimmers for LWE/LCE: LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P