

**LLFC321**
**LLFC311**

8.25" Square Ceiling Mounted Light with Scalloped Edges.

**Construction:**

- Rust and Fade Resistant Composite Construction with Powder coated Aluminum Base.

**Finishes:** Black (BLK) and White

**(WH) Light Sources:**

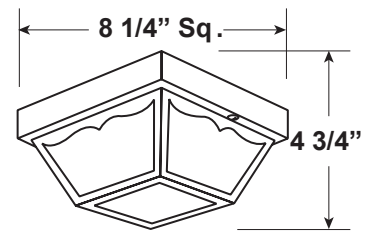
- **LLFC321-LE8:** 120V/13W/80CRI/1140LM@30K/TRIAC, 1280LM@40K/TRIAC
- **LLFC321-LE12:** 120V/14W/80CRI/1430LM@30K, 1500LM@40K/TRIAC

**LLFC321-L90U-40K:** UNV/11.3W/74CRI(TYP)/912LM@40K (Non-Dimming)

**LLFC311-MB:** Requires 1 x 120V/60W Max Medium Base Lamp (Not Included)

**Notes/Certification/Warranty:**

- Optional Photocell (for LE8 and LE12 Versions only)
- Assembled in the USA
- LED Operating Temperature -40°C to +40°C
- RoHS Compliant
- Energy Star Rated when fitted with LE8 and L9U Light Sources
- cULus Listed For Damp Locations
- 5 Year Warranty on LE8 Versions
- 3 Year Warranty on L9U Version
- 1 Year Warranty on Medium Base Version

**LLFC321  
LLFC311**


PART #	COLOR TEMP.	FINISH	DIFFUSER	OPTIONS
LLFC321-LE8 LLFC321-LE12	30K 40K	BLK WH	F-Frosted Polypropylene CG- Clear Glass	P- Photocell

PART #	FINISH	DIFFUSER	OPTIONS
LLFC321-L90U-40K	BLK WH	F-Frosted Polypropylene CG- Clear Glass	NA

*\*Energy Star Rated when fitted with LE8, LE12 and L9U Light Sources*
**Recommended Dimmers for LE8: and LE12 Light Sources** LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P

PART #	FINISH	DIFFUSER	OPTIONS
LLFC311-MB <sup>^</sup>	BLK WH	F-Frosted Polypropylene CG- Clear Glass	NL- No Lamp LWE <sup>1</sup> -120v/9.5w/800lm@3K/80CRI LCE <sup>1</sup> -120v/9.5w/800lm@4K/80CRI <small><sup>1</sup>LWE and LCE Medium Base Lamps are available for purchase with the MB Light Source. UL Listed. Energy Star. Triac Dimming. Rated for 15,000 Hours. 3 Year Limited Warranty</small>

<sup>^</sup> Requires MOQ of 50 Pieces

**Recommended Dimmers for LWE/LCE:** LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P