

LLFD311 & LLFD314


Surface Mount Drum in 2 Sizes

LLFD311

11" Surface Mounted Drum. White Powder Coated Aluminum Base with White Acrylic Lens.

Light Sources:

- **LLFD311-LE8:** 120V/13W/80CRI/1140LM@30K, 1280LM@40K/TRIAC
- **LLFD311-LE12:** 120V/14W/80CRI/1130LM@30K, 1500LM@40K/TRIAC
- **LLFD311-LE18:** 120V/22W/80CRI/1950LM@30K, 2130LM@40K/TRIAC
- **LLFD311-LT8:** 120V/12W/90CRI/1020LM@30K, 1040LM@40K/TRIAC
- **LLFD311-LT12:** 120V/16W/90CRI/1370LM@30K, 1400LM@40K/TRIAC
- **LLFD311-LT18:** 120V/24W/90CRI/1980LM@30K, 2020LM@40K/TRIAC
- **LLFD311-30K-L13U:** 120~277V/17W/80CRI/1278LM@30K/NON-Dimming.
- **LLFD311-MB:** Requires 1 x 120V/40W Max Medium Base Lamp (Not Included)

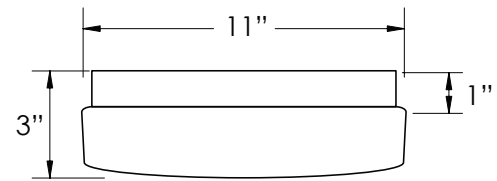

11" DRUM

Notes/Certifications:

- Optional Motion Sensor (for LE, LT and L13U-30K Versions only)
Installation of Motion Sensor defeats dimming and negates Energy Star.
- LED Operating Temperature -40°C to +40°C
- RoHS Compliant
- Energy Star Rated when fitted with LE and LT Light Sources
- cULus Listed For Damp Locations
- 5 Year Warranty on LE8 Versions
- 3 Year Warranty on L9U Version
- 1 Year Warranty on MB Version



PART #	COLOR TEMP.	OPTIONS
LLFD311-LE8 LLFD311-LE12 LLFD311-LE18 <small>LE Versions- 80 CRI</small>	30K 40K	MS- Motion Sensor

**Energy Star Rated LE and LT Light Sources*

PART #	COLOR TEMP.	OPTIONS
LLFD311-LT8 LLFD311-LT12 LLFD311-LT18 <small>LT Versions- 90 CRI</small>	30K 40K	MS- Motion Sensor

**Energy Star Rated LE and LT Light Sources*

PART #	OPTIONS
LLFD311-30K-L13U	MS-Motion Sensor

PART #	OPTIONS
LLFD311-MB [^]	NL- No Lamp LWE ¹ -120v/9.5w/800lm@3K/80CRI LCE ¹ -120v/9.5w/800lm@4K/80CRI <small>¹LWE and LCE Medium Base Lamps are available for purchase with the MB Light Source. UL Listed, Energy Star, Triac Dimming, Rated for 15,000 Hours. 3 Year Limited Warranty</small>

[^] Requires MOQ of 50 Pieces

LLFD314

14" Surface Mounted Drum. White Powder Coated Aluminum Base with a White Acrylic Lens.


Light Sources:

- **LLFD314-LE12:** 120V/14W/80CRI/1430LM@30K, 1500LM@40K/TRIAC
- **LLFD314-LE18:** 120V/22W/80CRI/1950LM@30K, 2130LM@40K/TRIAC
- **LLFD314-LE26:** 120V/32W/80CRI/2700LM@30K, 2750LM@40K/TRIAC

- **LLFD314-LT12:** 120V/16W/90CRI/1370LM@30K, 1400LM@40K/TRIAC
- **LLFD314-LT18:** 120V/24W/90CRI/1980LM@30K, 2020LM@40K/TRIAC
- **LLFD314-LT26:** 120V/31W/90CRI/2750LM@30K, 2850LM@40K/TRIAC

- **LLFD314-L17U:** 120~277V/22W/80CRI/1704LM@30K, 1824LM@40K/NON-Dimming.

- **LLFD314-2MB:** Requires 2 x 120V/40W Max Medium Base Lamp (Not Included)

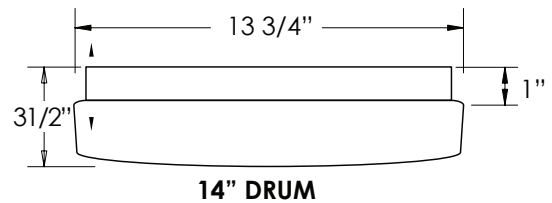

Notes/Certifications:

- Optional Motion Sensor (for LE, LT and L17U Versions only)
Installation of Motion Sensor defeats dimming and negates Energy Star.
- LED Operating Temperature -40°C to +40°C
- RoHS Compliant
- Energy Star Rated when fitted with LE and LT Light Sources
- cULus Listed for Damp Locations
- 5 Year Warranty on LE8 Versions
- 3 Year Warranty on L9U Version
- 1 Year Warranty on MB Version



PART #	COLOR TEMP.	OPTIONS
LLFD314-LE12 LLFD314-LE18 LLFD314-LE26	30K 40K	MS- Motion Sensor
<small>LE Versions- 80 CRI</small>		

*Energy Star Rated LE and LT Light Sources

PART #	COLOR TEMP.	OPTIONS
LLFD314-LT12 LLFD314-LT18 LLFD314-LT26	30K 40K	MS- Motion Sensor
<small>LT Versions- 90 CRI</small>		

*Energy Star Rated LE and LT Light Sources

PART #	COLOR TEMP.	OPTIONS
LLFD314-L17U	30K 40K	MS-Motion Sensor

PART #	OPTIONS
LLFD314-2MB [^]	NL- No Lamp LWE¹ - 120v/9.5w/800lm@30K/80CRI LCE¹ -120v/9.5w/800lm@40K/80CRI <small>¹LWE and LCE Medium Base Lamps are available for purchase with the MB Light Source. UL Listed, Energy Star, Triac Dimming, Rated for 15,000 Hours, 3 Year Limited Warranty</small>
<small>[^] Requires MOQ of 50 Pieces</small>	

Job Name: _____

Type: _____

Part #: _____

Notes: _____

Recommended Dimmers	
LE Series	LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P
LT Series	LUTRON SELV-303P-WH, LEVITON 6631-LW, LUTRON SKYLARK SELV-300P
LWE/LCE	LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P

* Note: Other dimmers may be used - please check with Lumencia for compatibility.


MOTION SENSOR

- ON/OFF only. Dimming not available when using Motion Sensor
- Available in LED & Incandescent
- Adjustable Time and Reach.
- Detects Motion Using High Frequency
- Input Voltage:
- 100-277VAC; 50/60Hz
- Operating Frequency: 5.8GHz
- 2.6W Power Consumption
- 360° Front Detection Angle
- 160° Side Detection Angle
- 39" to 26' Adjustable
- Detection Distance
- Time Delay: 8 Seconds to 12 Minutes
- Dusk-To-Dawn Sensitivity from 2-2000Lux (2000Lux is OFF)

Notes:


- UL CUL Listed
- FCC compliance Class B.

MS

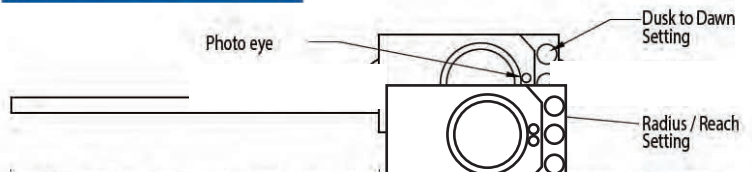

NOTE: Coverage pattern will vary based on installation of sensor and surrounding materials.

Ceiling Mount

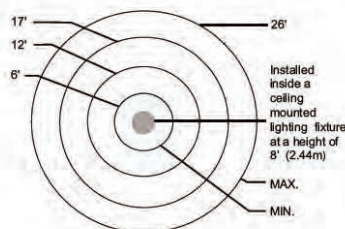

Wall Mount

