



# LLFD321


11" Surface Mounted Mushroom. White Powder Coated Aluminum Base with a White Acrylic Lens.

## Light Sources:


- **LLFD321-LE8:** 120V/13W/80CRI/1140LM@30K, 1280LM@40K/TRIAC
- **LLFD321-LE12:** 120V/14W/80CRI/1130LM@30K, 1500LM@40K/TRIAC
- **LLFD321-LE18:** 120V/22W/80CRI/1950LM@30K, 2130LM@40K/TRIAC
- **LLFD321-LT8:** 120V/12W/90CRI/1020LM@30K, 1040LM@40K/TRIAC
- **LLFD321-LT12:** 120V/16W/90CRI/1370LM@30K, 1400LM@40K/TRIAC
- **LLFD321-LT18:** 120V/24W/90CRI/1980LM@30K, 2020LM@40K/TRIAC
- **LLFD321-30K-L13U:** UNV/17W/80CRI/1278LM@30K/NON-Dimming.
- **LLFD321-MB:** Requires 1 x 120V/40W Max Medium Base Lamp (*Not Included*)

## Notes/Certifications:

- Optional Motion Sensor (for LE, LT and L13U-30K Versions only)
- LED Operating Temperature -40°C to +40°C
- RoHS Compliant
- Energy Star Rated when fitted with LE and LT Light Sources
- cULus Listed For Damp Locations
- 5 Year Warranty on LE8 Versions
- 3 Year Warranty on L9U Version
- 1 Year Warranty on MB Version

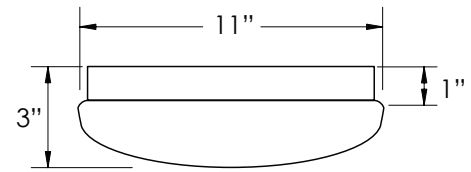

**11" MUSHROOM**

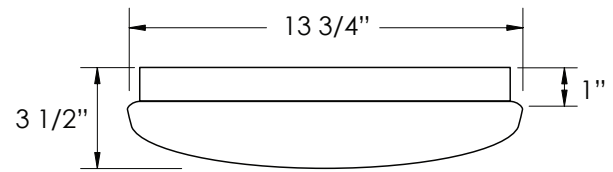

**14" MUSHROOM**

PART #	LIGHT SOURCE	CCT (LED ONLY)	FINISH	LENS	OPTION
LLFD321 (11")	LE800*	W-(3K)	W- White	WA-White Acrylic	<b>MS- Motion Sensor</b> Installation of Motion Sensor defeats dimming and negates Energy Star.
	LE1200*				
LLFD324 (14")	LE1800*	C-(4K)			*LWE- 120v/9.5w/800lm@3K/90CRI Estar and Title 24  *LCE- 120v/9.5w/800lm@4K/80CRI Estar  *LWE and LCE Medium Base Lamps are available for purchase with the INC140 and INC240 Light Source. UL Listed. Energy Star. Triac Dimming. Rated for 15,000 Hours.. 3 Year Limited Warranty.
	LE2600- (LLFD324 ONLY)				
	LT800				
	LT1200				
	LT1800				
	LT2600- (LLFD324 ONLY)				
	L1300- (LLFD321 ONLY. Only available in 3K)				
	L1700- (LLFD324 ONLY)				
	I140 (1 LAMP)				
	I240 (2 LAMP) - (LLFD324 ONLY)				

Recommended Dimmers	
<b>LE Series</b>	LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P
<b>LT Series</b>	LUTRON SELV-303P-WH, LEVITON 6631-LW, LUTRON SKYLARK SELV-300P
<b>LWE/LCE</b>	LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P


\* Note: Other dimmers may be used - please check with Lumencia for compatibility

## MOTION SENSOR

- ON/OFF only. Dimming not available when using Motion Sensor
- Available in LED & Incandescent
- Adjustable Time and Reach.
- Detects Motion Using High Frequency
- Input Voltage:
- 100-277VAC; 50/60Hz
- Operating Frequency: 5.8GHz
- 2.6W Power Consumption
- Front detection Angle
- Side detection Angle
- 39" to 26' Adjustable
- Detection Distance
- Time Delay: 8 Seconds to 12 Minutes
- Dusk-To-Dawn Sensitivity from 2-2000Lux (2000Lux is OFF)


### Notes:

- UL CUL Listed
- FCC compliance Class B.

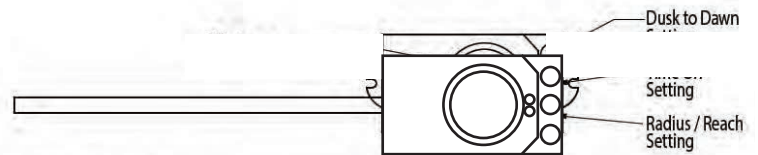

NOTE: Coverage pattern will vary based on installation of sensor and surrounding materials.

#### Ceiling Mount



#### Wall Mount

