


LLFD331 & LLFD334

Surface Mount Dome in 2 Sizes

LLFD331

11" Surface Mount Dome. White Powder Coated Aluminum Base with a White Acrylic Lens.

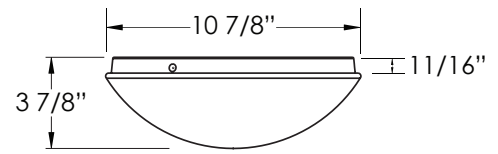

11" Dome

Light Sources:

- **LLFD331-LE8:** 120V/13W/80CRI/1140LM@30K, 1280LM@40K/TRIAC
- **LLFD331-LE12:** 120V/14W/80CRI/1130LM@30K, 1500LM@40K/TRIAC
- **LLFD331-LE18:** 120V/22W/80CRI/1950LM@30K, 2130LM@40K/TRIAC
- **LLFD331-LT8:** 120V/12W/90CRI/1020LM@30K, 1040LM@40K/TRIAC
- **LLFD331-LT12:** 120V/16W/90CRI/1370LM@30K, 1400LM@40K/TRIAC
- **LLFD331-LT18:** 120V/24W/90CRI/1980LM@30K, 2020LM@40K/TRIAC
- **LLFD331-30K-L13U:** 120~277V/17W/80CRI/1278LM@30K/NON-Dimming.
- **LLFD331-MB:** Requires 1 x 120V/40W Max Medium Base Lamp (Not Included)

Notes/Certifications:

- Optional Motion Sensor (for LE, LT and L13U-30K Versions only)
- Installation of Motion Sensor defeats dimming and negates Energy Star.
- LED Operating Temperature -40°C to +40°C
- RoHS Compliant
- Energy Star Rated when fitted with LE and LT Light Sources
- cULus Listed For Damp Locations
- 5 Year Warranty on LE8 Versions
- 3 Year Warranty on L9U Version
- 1 Year Warranty on MB Version



PART #	COLOR TEMP.	OPTIONS
LLFD3'1-LE8 LLFD3'1-LE12 LLFD311-LE18 <small>LE Versions- 80 CRI</small>	30K 40K	MS- Motion Sensor

*Energy Star Rated LE and LT Light Sources

PART #	COLOR TEMP.	OPTIONS
LLFD3'1-LT8 LLFD3'1-LT12 LLFD3'1-LT18 <small>LT Versions- 90 CRI</small>	30K 40K	MS- Motion Sensor

*Energy Star Rated LE and LT Light Sources

PART #	OPTIONS
LLFD3'1-30K-L13U	MS-Motion Sensor

PART #	OPTIONS
LLFD3'1-MB [^]	NL- No Lamp LWE ¹ - 120v/9.5w/800lm@3K/80CRI LCE ¹ - 120v/9.5w/800lm@4K/80CRI <small>¹LWE and LCE Medium Base Lamps are available for purchase with the MB Light Source. UL Listed. Energy Star. Triac Dimming. Rated for 15,000 Hours. 3 Year Limited Warranty</small>

[^] Requires MOQ of 50 Pieces

