

LLFH232 LLFH233

Classic post light in 2 sizes.

Integrated LED

- 120~277v, 50/60Hz
- Driver: UL Class2, Power Factor >.90
- Type V Distribution
- Ambient Operating Temperature: -40°C(-40°F) to +40°C(105°F)
- Integral Surge Suppression with option for Ground Surge Suppression

Retrofit E39 and E26

- Requires 120~277V lamp *(not included)*
- Lumencia offers LED E39 lamps.

Construction:

- Cast Aluminum with Stainless Steel Hardware.
- Polyester Powdercoat.
- Fits Standard 3" Poles.
- Acrylic Lens

Certifications:

- UL Listed for Wet Locations
- RoHS




Integrated LED

- 50,000 Hour Estimated Life
- 5 Year Warranty



LLFH232

LLFH233

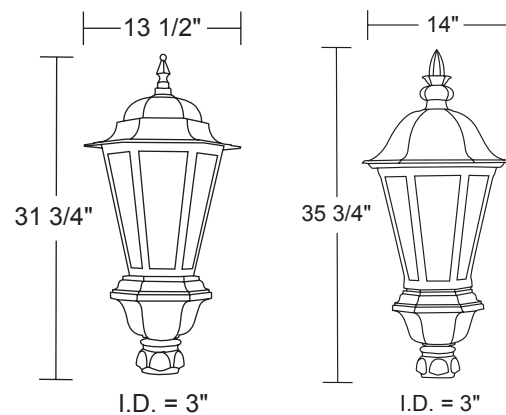

Part #	EPA (FT2)	Weight (LBS)	Back	Uplight	Glare
LLFH232	1.25	28	2	2	1
LLFH233	1.25	28	2	2	1

PART #	LIGHT SOURCE	CCT	FINISH	LENS	OPTIONS
LLFH232 LLFH233	L4000: 40W 4000lm L6000: 60W 6000lm	40K(Standard) 30K(Special Order) 50K(Special Order)	BLK-Black WHT-White (Special Order) BRZ-Bronze (Special Order)	F - Frosted Acrylic C - Clear Prismatic Acrylic	ACRYLIC BLACK OUT PANELS B1-One Panel B2-Two Panels B3-Three Panels

Ask about 0-10v Dimming



Job Name: _____

Type: _____

Part #: _____

Retrofit E39 and E26

PART #	BASE	FINISH	LENS	OPTIONS	Lamps – E39 Base Only. UL Listed. 5 Year Warranty
LLFH232 LLFH233	E39 (Mogul Base) E26 (Medium Base)	BLK-Black WHT-White <i>(Special Order)</i> BRZ-Bronze <i>(Special Order)</i>	F - Frosted Acrylic C - Clear Prismatic Acrylic	ACRYLIC BLACK OUT PANELS B1-One Panel B2-Two Panels B3-Three Panels	<p>NL: No Lamp (Standard)</p> <p>LE39-OMNI (E39 Base, 120~277v Type 5 Omnidirectional LED Corncob. 54w/5k/7290lm/80CRI. 360 Degree Coverage. Rated For Enclosed Fixtures. IP64 Rated. 4kv Surge Protection)</p> <p>LE39-CUTOFF (E39 Base, 120~277v Type 5 Dark-Sky Friendly Cutoff LED Corncob. 54w/5k/5900lm/80CRI. 180 Degree Vertical Coverage. Rated For Enclosed Fixtures. IP64 Rated. 4kv Surge Protection)</p> <p>LE39-SSL (E39 Base, 120~277v Type 3 Street Side LED Corncob. 40w/5k/5600lm/80CRI. 180 Degree Horizontal Coverage. 350 Degree Adjustable Twist Socket design. Rated For Enclosed Fixtures. IP64 Rated. 4kv Surge Protection)</p>