

LLFK391 LLFK395

Rough Service Surface Mount

Round or Square Surface Mount with Conduit Knockouts.
Available in Two Finishes with Two Polycarbonate Diffuser Options.

Light Source

- LE800-120V/13W/80CRI/1140LM@3K, 1280LM@4K/TRIAC
- LE1200-120V/14W/80CRI/1430LM@3K, 1500LM@4K/TRIAC
- LE1800-120V/22W/80CRI/1950LM@3K, 2130LM@4K/TRIAC
- L1800UNV- UNV/22W/74CRI(TYP)/1740LM@4K, 1824LM@4K
- I240- Requires Two 40W Max E26 Base Lamp. (Not Included)

Notes:

Construction:

- Composite Resin Construction makes for no rust or corrosion.

Listing:

- UL Listed for Wet Locations

Notable Options:

- LLFK391 and LLFK395 are Energy Star Rated when fitted with the LE800, LE1200 and LE1800 Light Sources
- Optional Motion Sensor Available for LE800, LE1200, and L1800UNV Light Sources.
- Optional Emergency Backup Available for LE800, LE1200, and L1800UNV Light Sources.
- I240 requires 50 Piece MOQ
- LED Operating Temperature -40°C to +40°C

Warranty/Certifications:


- 5 Year Warranty on LE800, LE1200 and LE1800
- 3 Year Warranty on L1800 Version
- 1 Year Warranty I175 Version.



LLFK391




HCMT: 5"

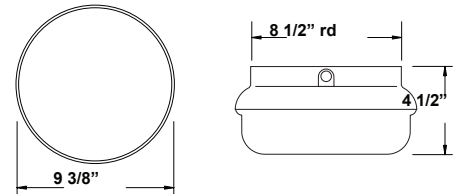

LLFK395



HCMT: 5"

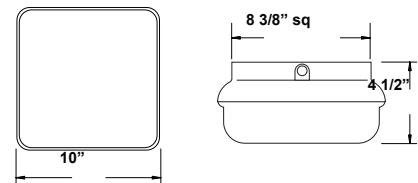

PART #	LIGHT SOURCE	CCT (LED ONLY)	FINISH	DIFFUSER	OPTION
LLFK391	LE800*	W-(4K)	BLK- Black	W- White	MS¹ -Motion Sensor EB¹ -Emergency Backup LWE² -120v/9.5w/800lm@3K/90CRI Estar and Title 24 LCE² -120v/9.5w/800lm@4K/80CRI Estar <small>²LWE and LCE Medium Base Lamps are available for purchase with the I160 and I260 Light Source. UL Listed. Energy Star. Triac Dimming. Rated for 15,000 Hours. 3 Year Limited Warranty</small>
	LE1200*	C-(4K)			
LLFK395	L1800UNV	W-(3K)	WH- White	W- White	
	I240	C-(4K)			

¹Motion Sensor and Emergency Backup for LE and L Versions Only

Recommended Dimmers

LE Series

LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P

LWE/LCE

LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P



- 135 Min. of Emergency Backup LED
- Test Switch/LED Charge Indicator 4W
- LED Backup Array
- NiCd, 3.6 VDC Battery
- 24hr Recharge Time
- Ambient Temp: 0°C to +40°C
- 5yr Warranty