




Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Part #: \_\_\_\_\_  
Notes: \_\_\_\_\_

**LLFL5524D-E-MCT**

**LLFL5539D-E-MCT**

**LLFL5554D-E-MCT**

**LED Linear Wall Sconce with Satin Nickel Accents in 3 Sizes.**

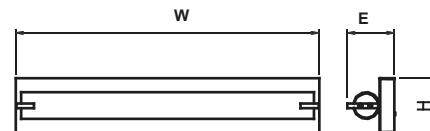

**Dimensions:**

- **LLFL5524D-E-MCT:** 25.5" L x 4.3" H x 3.8" E
- **LLFL5539D-E-MCT:** 37.3" L x 4.3" H x 3.8" E
- **LLFL5554D-E-MCT:** 49.1" L x 4.3" H x 3.8" E

**Performance:**

- **LLFL5524D-E-MCT:** UNV/17w/1520lm Del@30K/80CRI  
Non-Dimming Standard. 0-10V or TRIAC Dimming Optional
- **LLFL5539D-E-MCT:** UNV/24w/2110lm Del@30K/80CRI  
Non-Dimming Standard. 0-10V or TRIAC Dimming Optional
- **LLFL5554D-E-MCT:** UNV/36w/3220lm Del@30K/80CRI  
Non-Dimming Standard. 0-10V or TRIAC Dimming Optional

**Notes/Certification/Warranty:**

- MCT: Selectable Color Temp 30K/35K/40K
- Die Formed Cold Rolled Steel
- White Acrylic Shade
- UNV=Universal Voltage 120~277V
- UL/cUL or ETL/cETL Listed
- Damp Location Rated
- 5 Year Limited Warranty on Driver and LED
- 1 Year Warranty Against Manufacturing Defects on Housing and Shade



**ORDERING INFORMATION**

Model	Finish	Options
LLFL5524D-E-MCT	SN	010v: 0-10V Dimming
LLFL5539D-E-MCT	CC*	TRIAC: TRIAC Dimming
LLFL5554D-E-MCT		

\*Special Order- MOQ and Longer Lead Times may Apply.

May be available in other wattages, voltages, color temperatures, finishes, and lamping sources with orders of 50 units or more. Contact your rep or the factory for more information. Note: Specifications are subject to change without notice.