Lumencia™
Multi-Unit Residential Lighting

Job Name:

Type:

Part #:

Notes:

LLFS1..
LLFS1..

Sentinel Surface Mount

Sentinel Surface Mount is available in Two Sizes and Three Diffuser Options.

Light Source:

- **LE800*-**120V/13W/80CRI/1140LM@3K, 1280LM@4K/TRIAC
- **I140-** Requires one 40W Max E26 Base Lamp. (Not Included)

Notes:

Construction:
- White Powder Coated Aluminum Pan

Listing:
- UL Listed for Wet Locations

Notable Options:
- *LLFS112 and LLFS113 are Energy Star Rated when fitted with the LE800 Light Source
- I140 requires 50 Piece MOQ
- Made in the USA
- LED Operating Temperature -40°C to +40°C

Warranty/Certifications:
- 5 Year Warranty on LE800
- 1 Year Warranty I140 Version.

LLFS112



EXTENDS: 4 1/4”
HCMT: 3 7/8”

LLFS113

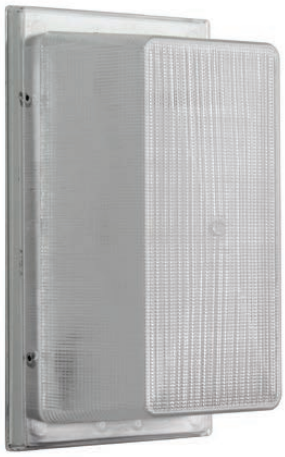



EXTENDS: 4 1/2”
HCMT: 5 1/4”

PART #	LIGHT SOURCE	CCT (LED ONLY)	FINISH	DIFFUSER	OPTION
LLFS112 LLFS113	LE800* I140	.. (3K) .. (4K)	**W-** White	**F**-Glare Reduced Frost Prismatic	**LWE**[1]-120v/9.5w/800lm@3K/90CRI Estar and Title 24 **LCE**[1]-120v/9.5w/800lm@4K/80CRI Estar [1]LWE and LCE Medium Base Lamps are available for purchase with the I140 Light Source. UL Listed. Energy Star. Triac Dimming. Rated for 15,000 Hours. 3 Year Limited Warranty

Recommended Dimmers	
LE Series	LUTRON S-600H-WH, LUTRON LG-603PH-AL, LEVITON 6631-LW, LUTRON DIVA DVCL-153P, LUTRON DV6200P-WH, LUTRON SKYLARK S-600P
LWE/LCE	LEVITON IPL06-10Z, LEVITON 6674, LEVITON DECORA 6672, LUTRON DVCL-153P, LUTRON DIVA VCL-153P

2021.09

Office: 267-438-3000 Fax: 267-288-5604
www.Lumencia.com

Specifications subject to change without prior notice.
© 2021 Lumencia. ALL RIGHTS RESERVED