



LLRT56ICA-FR
Lumencia Fire Rated Housing with Two LED trim Options
Airtight IC Housing, Fire Rated for 2-Hours.

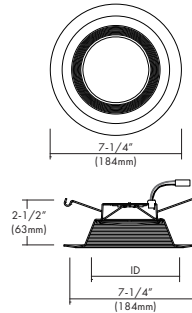

LLFR56 6" LED Trim for Use with LLRT56ICA-FR Recessed Housing

Available in Baffle and Smooth Trim

120V/12W/810lm TRIAC Dimming
Wet Location Rated

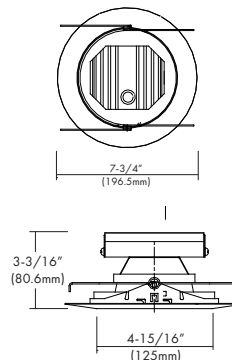

LLAF6AD Gimbal Trim for Use with LLRT56ICA-FR Recessed Housing

120V/12.5w/900lm TRIAC Dimming
Damp Location Rated
Only Available in White

Housing	TRIM	CRI	COLOR TEMP.	FINISH	DRIVER	CONECTOR
LLRT56ICA-FR	LLFR56	80	27K 30K 35K 40K	RWHT: White Reflector BWH: White Baffle RBLK: Black Reflector BBK: Black Baffle	DOB: 120V Driver On Board	ZE- Genderless Quick Connector (Select when ordering with LEDH Housings)
	LLAF6AD	90		WHT: White		

Compatible Dimmers

Lutron: Diva® DVCL Series, Diva® DVLV Series, Nova T® NT Series, Glyder® GLV Series, Ariadni® AYCL Series, RadioRA 2® 10ND Series, Skylark® SLV Series, Skylark® SLV Series, Skylark® Contour CTCL Series, Maestro Wireless MRF2-6ND Series, Lutron® Homeworks® RPM-4U, Lutron® Homeworks® QS HQRD-6ND Series, Lutron® Homeworks® QS HQRD-10ND Series, Diva® DVELV Series, Nova T® NTELV Series, RadioRA RRD-6NA Series, Maestro MAELV Series, Maestro MRF2-6ELV Series, Skylark® SELV Series, Lutron® Grafik Eye PHPM-PA Series, Lutron® Homeworks® QS HQRD-6NA Series

Leviton: SureSlide 6633

LLRT56ICA-FR

Galvanized Steel with Flexible Non-Combustible Insulation.

Dimensions: 6.5"D x 9.0"W x 12.5"E

Aperture for Can: 6.125"

Height of Can: 7.5"

Junction Box:

- J-box is listed for through-branch circuit wiring (4in - 4out), with three 1/2" knockouts and four non-metallic cable knockouts with strain clamps.
- 3-port quick connectors pre-installed in J-Box.

Bar Hanger:

- Pre-installed bar hangers allow the housing to be positioned at any point within 24" joist span
- Pre-installed captive nails on bar hangers
- Bar hangers can be turned 90° on the plaster frame
- Bar hangers are designed to fit T-bar spine without additional clamps for use in drop ceilings

Notes:

- Suitable for use in new construction applications
- IC Rated for direct contact with insulation
- Adjusts to accommodate up to 1-1/2" ceiling thickness
- 2-hours fire rated

Warranty/Certifications:

- cULus Listed for Wet Location (with specified trims)
- Certified under ASTM-E283 for Air tight construction
- 2 HOURS FIRE RATED UL Listed (UL1598 / UL263)
- 3 Year Limited Warranty



LLFR56

120VAC LED DoB Recessed Trim

Dimensions: 7.74"OD x 3.1875"H

Light Source:

- 120V/12W/810lm
- 80 or 90 CRI
- Color Temp: 27K, 30K,35K,40K
- Beam Angle: 92.7°
- 10-100% TRIAC Dimming

Warranty/Certifications:

- 50K Life Hrs
- 3 year Limited Warranty
- Wet Location Rated



LLAF6AD

120VAC LED DoB 6" Recessed Gimbal

Dimensions: 7.74"OD x 3.1875"H

Light Source:

- 120V/12.5w/900lm
- 80 or 90 CRI
- Color Temp: 27K, 30K,35K,40K
- Beam Angle: 74°
- 10-100% TRIAC Dimming

Notes:

- White Only
- Gimbal head rotates 358 degrees and can tilt 0 - 30°

Warranty/Certifications:

- 50K Life Hrs Module
- 3 year Limited Warranty
- Damp Location Rated

