



Job Name: \_\_\_\_\_

Type: \_\_\_\_\_

Part #: \_\_\_\_\_

Notes: \_\_\_\_\_

# LLIN22-R

2x2 Recessed Linear. Available in Continuous Runs and Custom Shapes.

**Finishes:** White (WH) Standard. Custom Colors (CC) Available by Special Request.

**Body Material:** Die-formed and welded 22 gauge cold rolled steel

**Knockouts:** On ends allow continuous wireway mounting



**Lens:** Housing is specially designed for direct/indirect lighting with separating lamps compartments for each. Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers.

## Mounting:

- Drop Ceiling Flanged (DCF)
- Drywall Flanged (DWF)
- Drywall Trimless (DWTL)
- Drywall Mud Kit (DWMK)

## Notes/Certifications/Warranty:

- CRI 80+ Standard, 90 CRI by Special Order
- Available Voltage:
  - UNV: 120~277V Multivolt with 010v Dimming.
  - 120V: 120VAC with TRIAC Dimming.
- UL listed for damp locations
- BAA Compliant

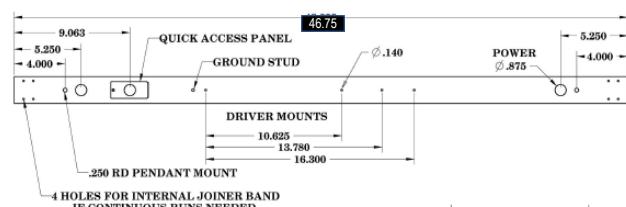

## Ordering Information

PART #	LENGTH	DOWNLIGHT	VOLTAGE	COLOR TEMP	FINISH	OPTIONS
LLIN22-R-DCF Drop Ceiling Flanged	2 Foot	DLFx Select a lumen per foot between 200 and 2900	UNV (120~277V Multivolt with 010v Dimming) 120V (120VAC with TRIAC Dimming)	30K 35K 40K 50K	WH White BK Black	C9 90 CRI
	4 Foot	DLFx Select a lumen per foot between 200 and 2900			CC Custom Color (Provide RAL)	EM5 5w emergency battery back up
	8 Foot	DLFx Select a lumen per foot between 200 and 2900				EM12 12w emergency battery backup
	CLXX Custom Length - xx = length in feet CXXY Custom Shape xx = length in feet, yy = width in feet	DLFx Select a lumen per foot between 200 and 2900				

FOR UPLIGHT/DOWNLIGHT OPTION, UPLIGHT LUMENS WILL MIMIC DOWN LUMENS, DOUBLE THE WATTAGE