



Job Name: _____
 Type: _____
 Part #: _____
 Notes: _____

LLIN44

A 4x4 linear fixture available as a Pendant, Wall, or Surface Mount

Finishes: White (WH) Standard. Custom Colors (CC) Available by Special Request.

Body Material: Die-formed and welded 22 gauge cold rolled steel

Knockouts: On ends allow continuous wireway mounting

Lens: Smooth White Acrylic. Fixture accepts various lenses or louvers. 4' and 8' units have a steel mullion to join two individual diffusers. Snap in lens is ideal for uplight.

Mounting:


- Wall Mount
- Pendant Mount-Aircraft Cable Standard Stems Available by Request.
- Surface Mount

Notes/Certifications/Warranty:


- Available in Downlight or Up/Downlight
- CRI 80+
- Available Voltage:
 - **UNV:** 120~277V Multivolt with 010v Dimming.
 - **120V:** 120VAC with TRIAC dimming.
- UL listed for damp locations
- BAA Compliant



4FT Dimensions



8FT Dimensions

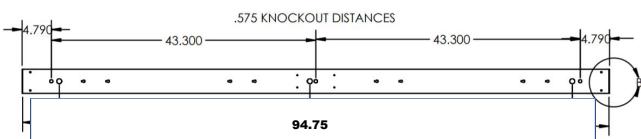

Ordering Information

PART #	LENGTH	DOWNLIGHT	UPLIGHT (OPTIONAL)	VOLTAGE	COLOR TEMP	FINISH	OPTIONS
LLIN44-P Pendant Mount	2 2 Foot	DLFxx Select a lumen per foot between 200 and 2900	ULFxx Select a lumen per foot between 200 and 2900	UNV (120~277V Multivolt with 010v Dimming) 120V (120VAC with TRIAC Dimming)	30K 35K 40K 50K	WH White BK Black CC Custom Color (Provide RAL)	EM5 5w emergency battery back up
	4 4 Foot	DLFxx Select a lumen per foot between 200 and 2900	ULFxx Select a lumen per foot between 200 and 2900				EM12 12w emergency battery backup
	8 8 Foot	DLFxx Select a lumen per foot between 200 and 2900	ULFxx Select a lumen per foot between 200 and 2900				AC4 4' Adjustable Aircraft Cable
	XX Custom Length **Custom shapes and continuous runs are available please call	Please Call your Lumencia Rep for Custom Length/Shape Options					AC8 8' Adjustable Aircraft Cable

FOR UPLIGHT/DOWNLIGHT OPTION, UPLIGHT LUMENS WILL MIMIC DOWN LUMENS, DOUBLE THE WATTAGE
 *For Uplight/downlight option, aluminum-backed led board is mounted on top of fixture