

## LLPF71Q-F POST TOP

Lumencia's LLPF71Q Reveal Architectural Enclosed Small Round Post Top is available in a Type V distribution with two lens options designed to replace HID lighting systems up to 250w MH or HPS. The fixture mounts to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 20 feet can be used based on light level and uniformity requirements.

### Specifications and Features:

#### Housing:

Die Cast Aluminum Housing, Integral Heat Sinking. Photocell Adaptable.

**Dimensions:** 16.125" D x 14.875" H

#### Finish:

Textured Architectural Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

#### Lens:

Clear UV-Stabilized Polycarbonate Array Lens to Seal LED Array. Prismatic Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Outer Conical Lens

#### Mounting Options:

Accommodates "P3" 2 1/8" O.D. x 3" Tenons

#### EasyLED LED:

Aluminum Boards

#### Wattage:

37w Array: 37w, System: 39w; (70-150w HID Equivalent)

65w Array: 65.1w, System: 68w; (150-250w HID Equivalent)

84w Array: 84w, System: 86w; (150-250w HID Equivalent)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Controls:


Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available. Please Consult Factory. Fixtures are Tested with LEPC Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Notes/Certification/Warranty

Buy American Act Compliant

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

5-Year Warranty for -40°C to +50°C Environment.

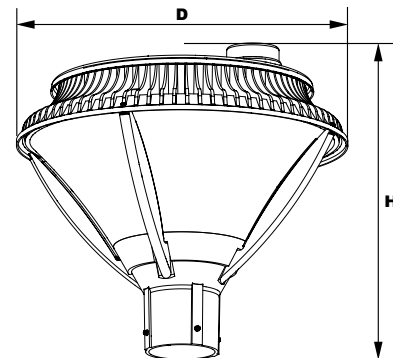

Model #	Wattage	Driver	CCT	C Lens	Color	Options
LLPF71Q-F	37W 65W 84W	U=120-277V H=347-480V	30K* 40K 50K  *37w & 84w	C= Clear Polycarbonate Array Lens  L=SoftLED LumaLens Opal UV- Stabilized Polycarbonate Array Lens*	BRZ= Bronze BLK=Black C=Custom (Consult Factory)	P2AB=PSRTN Tenon Adaptor, Black P2AC=PSRTN Tenon Adaptor, Custom Color (Consult Factory) SF=Single Fuse* DF=Double Fuse* SP=Surge Protection R3=3-Pin Twist Lock Photocell Receptacle R5=5-Pin Twist Lock Photocell Receptacle R7=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle S2=Microwave Sensor with Dimming for Mounting Heights of 8' to 40'* S4=Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19'*  *120-277V Models Only.

## Accessories & Replacement Parts:

### Mounting Accessories (Order Separately, Field Installed)

LLPSRTN\* Retrofit Tenon Adaptor, Die Cast with Powdercoat. Finish, Hardware Included. Converts a 2 1/4" x 4" Pole Tenon to a 2 1/4" x 3" Tenon.

\*Specify Color: B=Black, C=Custom (Consult Factory)



LLPSRTN

### EPA (Effective Projected Area)

EPA (Sq. Ft.)	Weight (Lbs.)
0.68	14 Lbs

### Replacement Parts (Order Separately, Field Installed)

LLPF70PC Clear UV-Stabilized Polycarbonate Outer Conical Lens.

LLPF70PCL SoftLED LumaLens Opal UV-Stabilized Polycarbonate Outer Conical Lens

LLP17117 Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz

LLP17123 Internally Mounted Microwave On/Off Motion Sensor for Mounting Heights of 8' to 19', 120-277VAC, 50/60Hz



LLPF70PC



LLPF70PCL



LLP17117



LLP17123

### Accessories (Order Separately, Field Installed)

LLP18131 Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.

LLP18132 Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.

LLP18140 110-120VAC Instant Twist Lock Photocell

LLP18152 277VAC Time Delay Twist Lock Photocell

LLP18156 120-277VAC Universal Twist Lock Photocell

LLP18157 480VAC Time Delay Twist Lock Photocell. For 480V use only.



LLP18131



LLP18132



LLP18140



LLP18152




LLP18156,  
LLP18157

### Photometric Data

LLPF71Q-F1X84U5KC

Grid in MH  
MH=16 Feet

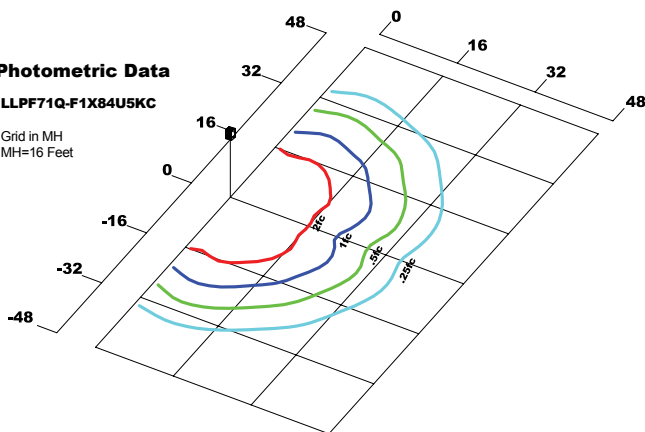

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 37w	525	39	Type V Clear	3,062	79	2	2	1	2,987	77	2	2	1	2,856	73	2	2	1
			Type V Opal	2,640	68	2	2	1	2,554	65	2	2	1	2,441	63	2	2	1
EasyLED 84w	525	86	Type V Clear	6,951	81	2	2	1	6,781	79	2	2	1	6,483	75	2	2	1
			Type V Opal	5,994	70	2	2	1	5,798	65	2	2	1	5,542	64	2	2	1

### Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 86w	1.00	0.98	0.97	0.94	473,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.97	0.95	0.90	290,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.98	0.95	0.91	220,000

#### NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.