

## LLPTCOL-2G

### Colonial Aluminum Post Top with Frosted Glass Diffuser

#### Construction:

- Standard Finish: Black
- Stretched aluminium sleeving, suitable for 2-3/8" (60mm) and 3" (76mm) diameter pole.
- Aluminum heat sink, stainless steel housing.
- Fully gasketed housing.

#### LED:


- Color Temperature: 4000/5000 (K)
- 30W & 60W come with field-adjustable CCT (30~50K).
- 120W can be either 40/50K.
- CRI: >70
- Type V distribution.
- Up to 100 LM/W.
- Proprietary binning for uniform color.

#### Notes:

- Ambient Operating Temperature: 4°F (-20°C) ~ 122°F (50°C).
- Power Factor: >0.9
- Input Voltage: 120V-277V, 50/60Hz
- THD <15%
- Non-dim is standard.
- 0-10V dim is optional.

#### Certifications/Warranty:

- cETLus listed.
- IP65.
- 5 years warranty.




\* All dimensions are in inches (millimeters).

MODEL	LED	COLOR TEMP.	VOLTAGE		MOUNTING	CONTROL		OPTIONS		
LLPTCOL-2G	30W 60W	MCT <i>Selectable 30/40/50K</i>	UNV	120-277V (Std.)	P3 P2	3" Pole (Std.) 2-3/8" Pole	(Blank)	None	BIRD	Bird Guard, Stainless Steel Spikes
	120W	40K 50K					PCUNV	3-Pin Receptacle and Twist Lock Photocell Installed 120-277V		
							TLPC-SC	Shorting Cap		
							RC7	NEMA 7-wire receptacle only (no controls)		


### CONFIGURATIONS

	Input Watts	Lumen Output (3000K)	Lumen Output (4000K)	Lumen Output (5000K)	Weight
LLPTCOL-2G	30W	2400 lm	2700 lm	3000 lm	25 lbs (11.3 kg)
	60W	4800 lm	5400 lm	3000 lm	
	120W	-	9600 lm	12000 lm	


#### LLPTCOL-2G-30

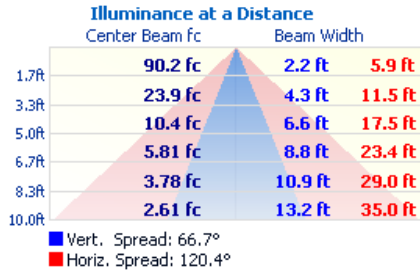


#### LLPTCOL-2G-60

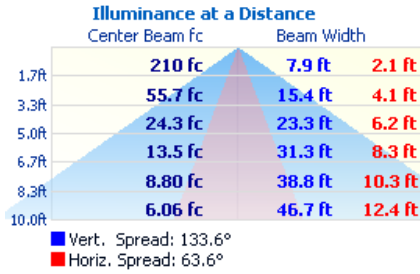


#### LLPTCOL-2G-120

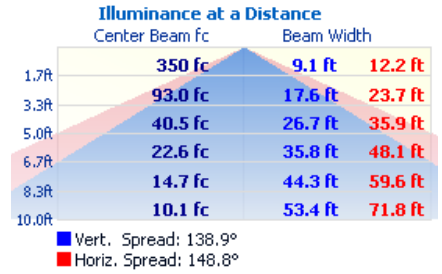

#### Polar Candela Distribution

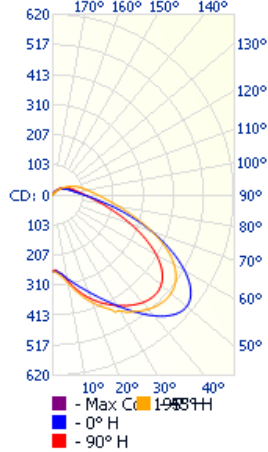

#### Polar Candela Distribution

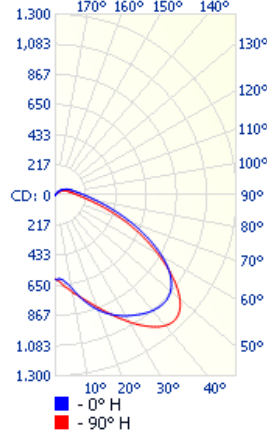

#### Polar Candela Distribution

