

LLRPL

LED SLIM PANEL LIGHT

FEATURES

- Aluminum die cast outer frame
- Air tight
- Ceiling recessed mount
- Beam Angle: 110°
- Glare free lens

DISCONTINUED



LED

- Color Temperature: 3000/4000(K)
- 50,000 hours
- Color Rendering Index: > 90

The LLRPL LED panel downlight with remote driver box combines high quality light output and efficiency while eliminating the pot light housing for competitive affordability. These LED panel downlights are intended for closets, attics, hallways, bathrooms, kitchens, basements, soffits, entry ways, porches, garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas.

ELECTRICAL

- Power Factor: +0.9
- Ambient Operating Temperature: -20°C (-5°F) ~ 40°C (105°F)
- Triac dimming: 10%~100%
- 120V only

WARRANTY & LISTINGS

- ROHS compliant
- Energy Star
- ETL listed
- Conforms to UL STD-1598
- Certified to CSA STD C22.2 No. 250.0-08
- Suitable for damp locations
- Type IC rated for direct contact with insulation
- 5 years limited warranty

DIMENSIONS


Specifications: RPL 4"

Diameter: 4-3/4 (120)
 Height: 7/8 (22)
 Hole cut size: Ø 4-3/32" (104)

Specifications: RPL 6"

Diameter: 6-3/4 (171)
 Height: 7/8 (22)
 Hole cut size: Ø 6-1/16" (154)

All dimensions are in inches (millimeters).

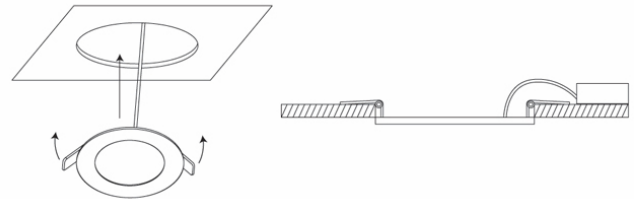

	Input Wattage	Color Temp.	Lumen Output	Lumen Efficiency
4"	12W	3000K	704LM	58.6 lm/W
		4000K	751LM	62.5 lm/W
6"	15W	3000K	927LM	61.8 lm/W
		4000K	974LM	64.9 lm/W

ORDERING INFORMATION

EXAMPLE: LLRPL-4-12LED/40-120

MODEL	SIZE	LED	COLOR TEMP	VOLTAGE
LLRPL	4 = 4" 6 = 6"	12LED = 12W LED 15LED = 15W LED	/30 = 3000K /40 = 4000K	120 = 120V