

LLSAUC-3WS-60

LLSAUC-3WS-100

LLSAUC-3WS-150

Saucer Post Top in Black. 3 Selectable Wattage Options

Materials:

Body Material: Heavy Duty Die-Cast Aluminum Housing with Anti-UV Polyester Coating

Lens: Anti-UV Clear Polycarbonate IES/ NEMA Type 5 Lens

Dimensions: 17.99"OD x 17.48"H

Electrical:


- 120~277V
- 0-10V Continuous Dimming.
- Input Frequency: 50/60 Hz
- 3WS-60:
 - 30W/4200lm, 50W/7000lm, 60W/8400lm
- 3WS-100:
 - 60W/8400lm, 80W/11200lm, 100w/14000lm
- 3WS-150:
 - 100W/14000lm, 135W/18900lm, 150W/21000lm
- Lumens Per Watt: 140lm/W
- 3 MCT: Selectable Color Temperature: 30K, 40K, 50K
- Efficacy: 140lm/W
- Power Factor: >0.9
- Total Harmonic Distortion (THD): <10%
- CRI: >70

See Ordering Section for Lumen Notes

Mounting: Includes 3-inch Slip-Fit Pole Mounting base.

Notes/Certifications/Warranty:

- Operating temperatures -40°F to 113°F (-40°C to 45°C)
- UL certified to meet US and Canadian standards
- Wet Location Rated
- FCC Compliant
- RoHS Compliant
- 50K Life Hours
- 5 Year Limited Warranty

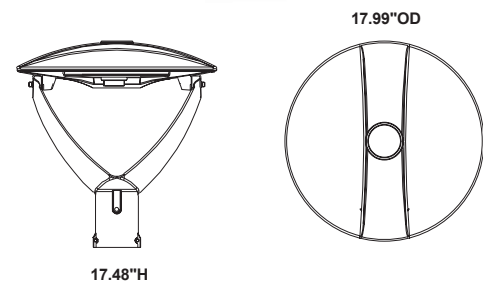

PART #	NOTES
LLSAUC-3WS-60	3 Watt Selectable 60W Max: 30W(4200lm), 50W(7000lm) 60W(8400lm) 3 MCT: 30K/40K/50K
LLSAUC-3WS-100	3 Watt Selectable 100W Max: 60W(8400lm), 80W(11200lm), 100w(14000lm) 3 MCT: 30K/40K/50K
LLSAUC-3WS-150	3 Watt Selectable 150W Max: 100W(14000lm), 135W(18900lm), 150W(21000lm) 3 MCT: 30K/40K/50K